


# Data Sheet | Item Number: 706-3033/202-200

System cable; for Schneider Modicon TM3; 8 digital outputs; Length: 2 m; Conductor cross-section: 0.14 mm<sup>2</sup>

<https://www.wago.com/706-3033/202-200>

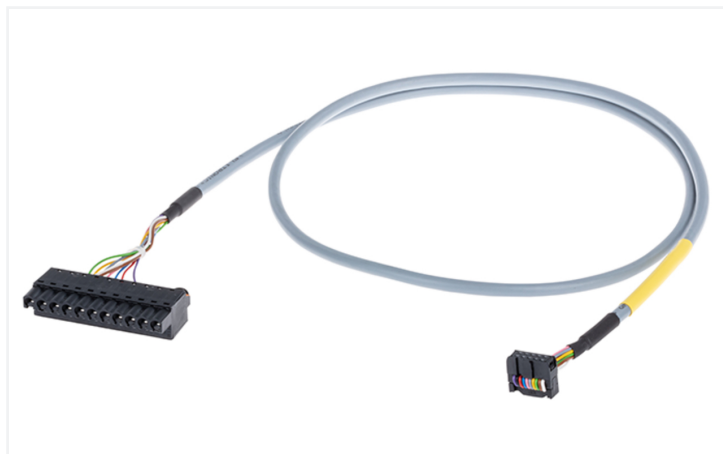

Color coding acc. to DIN VDE 47100	10 poles flat connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0.0	1	OUT0
Brown	2	0.1	2	OUT1
Green	3	0.2	3	OUT2
Yellow	4	0.3	4	OUT3
Grey	5	0.4	5	OUT4
Pink	6	0.5	6	OUT5
Blue	7	0.6	7	OUT6
Red	8	0.7	8	OUT7
Black	9	+24V	9	V+
Violet	10	0V	11	V-

Similar to illustration

## Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

## Electrical data

Inputs/outputs	8 digital outputs
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

## Compatibility

### Schneider

Schneider Modicon TM3      TM3 DQ8T(G)

## Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

### Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	10
Connection type	System
Wire cross-section	0.14 mm <sup>2</sup>

Connection 2	
Connector	TM3 DQ8T(G)
Pole number	11
Connection type	System
Wire cross-section	0.14 mm <sup>2</sup>

Physical data	
Cable length	2 m

Material data	
Fire load	0 MJ
Weight	131 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C


Commercial data	
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143623766
Customs tariff number	85444290900

Product Classification	
UNSPSC	26121629
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

## Downloads

### Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 706-3033/202-200	

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf 533.15 KB	
--	------------------	---