



## Features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- 15,000 hours average rated life


## Product Overview

Product name	ToLEDo CANDLE 250LM 840 E14 SL
Technology	LED
Lamp shape	Candle
Cap/Base	E14
Lamp finish	Opal
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	240
Photobiological Risk Group	RG1
Wattage (W)	2.2
Power consumption (W)	2.2
Control gear type	LED driver constant current
Dimmable	No

## ToLEDo CANDLE 250LM 840 E14 SL 0030882

Housing colour	White
IP rating	IP20
Product EAN number	5410288308821
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	250

### Technical drawings

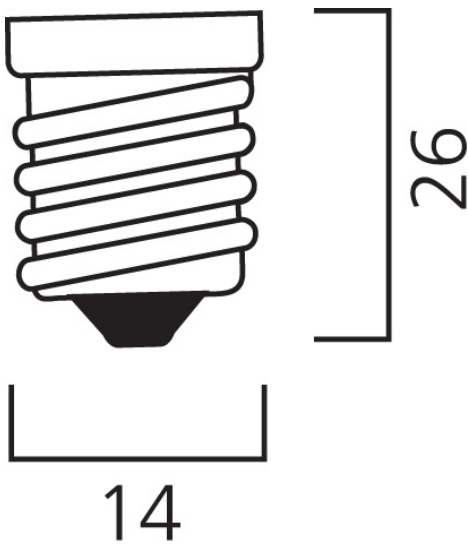

### Data table

#### GENERAL DATA

Product name	ToLEDo CANDLE 250LM 840 E14 SL
Technology	LED
Lamp shape	Candle
Cap/Base	E14
Lamp finish	Opal
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959

## ToLEDo CANDLE 250LM 840 E14 SL 0030882

Warranty	3 years
----------	---------

### OPTICAL DATA

Useful luminous flux (#use)	250
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	240
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Power consumption (W)	2.2
Wattage (W)	2.2
Equivalent watt (W)	25
Current (A)	0.025
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	5.4
Inrush Duration (µs)	110
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

### PHYSICAL DATA

## ToLEDo CANDLE 250LM 840 E14 SL 0030882

Housing colour	White
IP rating	IP20
Nominal Product Height (mm)	102
Nominal Product Diameter (mm)	35
Weight (kg)	0.016

### PACKAGING

Product EAN number	5410288308821
Packaging single length / height (cm)	4.5
Packaging single width (cm)	4.5
Packaging single depth (cm)	11.0
DUN14 (inner)	15410288308828
Units per outer package	6
Packaging outer length / height (cm)	14.3
Packaging outer width (cm)	9.7
Packaging outer depth (cm)	12.2

### SAFETY DATA

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures


# SYLVANIA

ToLEDo CANDLE 250LM 840 E14 SL  
0030882

## Energy label



0030882

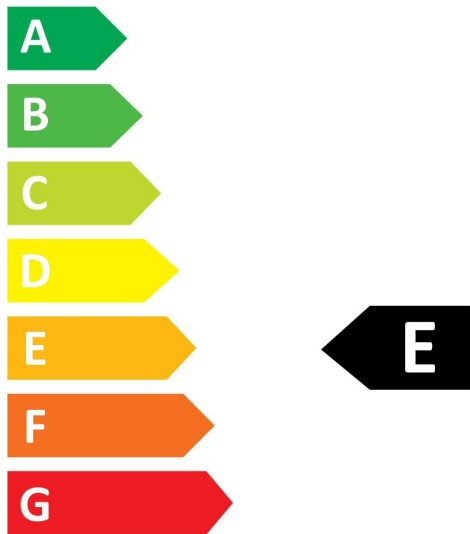


**3**  
kWh/1000h



2019/2015



0030882

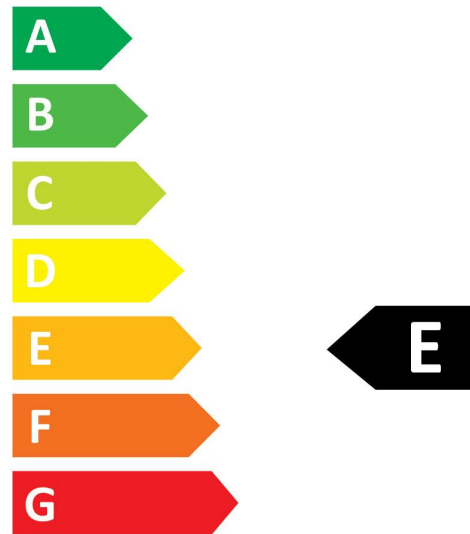

**3**  
kWh/1000h



2019/2015