


# LED Driver 75 W

LED-75

LED Driver 75 W is used for 12/24 V DC tunable or single color LED strips up to 75 W load. LED-75 has one input for control and can also be controlled wirelessly via the app or through other products from Plejd. It can also be controlled automatically with built-in time functions such as astro/time schedule.

Can be mounted with screws on wall (not included).

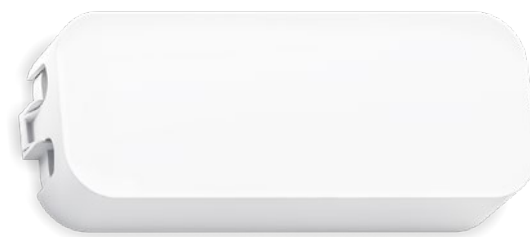

## Technical data

Mains electricity  
Standby power  
Efficiency at full-load  
Operating temperature

230 V/50 Hz, max. 0.5 A  
Pno: N/A, P<sub>sb</sub>, P<sub>net</sub>: 0.35 W  
90 %  
-25 to +40 °C  
Non-condensing

Dimensions  
Cable area  
Protection

162x62x34 mm  
Connections: 0.5–2.5 mm<sup>2</sup>  
Overtemperature software  
Short circuit protection

Total product weight  
IP rating

295 g  
IP20

## Radio

2.4 GHz mesh  
Bluetooth®  
<10 dBm

Radio range: Approx. 10 m indoors.  
The Plejd mesh technology extends the range by allowing the units to communicate with each other.

## Load (CV)

12 V DC 1–40 W  
24 V DC 1–75 W

If the load isn't tunable, you may connect it to either of the negative (-) terminals.

