

Concord

NILO 800 DIR/INDIR 3K DALI EM WHITE 2050604



Features

• Nilo is a 360° curve-shaped luminaire with a striking, minimalistic design, perfect for retail, hospitality, and office environments. The product can be suspended at different heights to create appealing lighting effects. Stand-alone and self-contained lighting fixture. Aluminium body, opal diffuser, emits direct and indirect lighting. Textured white finishing colour. Light color temperature: 3000K, warm white. System power: 56W Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation. DALI dimmable, 3-hours self-contained EMPRO self-test emergency, 220-240V / 50-60Hz. Electrical protection: Class I. 80% direct, and 20% indirect lighting. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: diameter 800mm x 65mm. 3h emergency in function: direct lighting only, partial lighting (only direct and 1/4 of whole luminaire is light up in emergency mode), 200lm.

Product Overview


| | |
|-----------------------------------|------------------------------------------|
| Product name | NILO 800 DIR/INDIR 3K DALI EM WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Suspended |
| General application | Hospitality, Museums & Galleries, Retail |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 5700 |
| Luminaire efficacy (lm/W) | 102 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |

Concord

NILO 800 DIR/INDIR 3K DALI EM WHITE 2050604

| | |
|---------------------------------|-----------------------------|
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 23 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 56 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5025768506040 |
| Warranty | 5 years |
| Dimming method | DALI |

Photometry

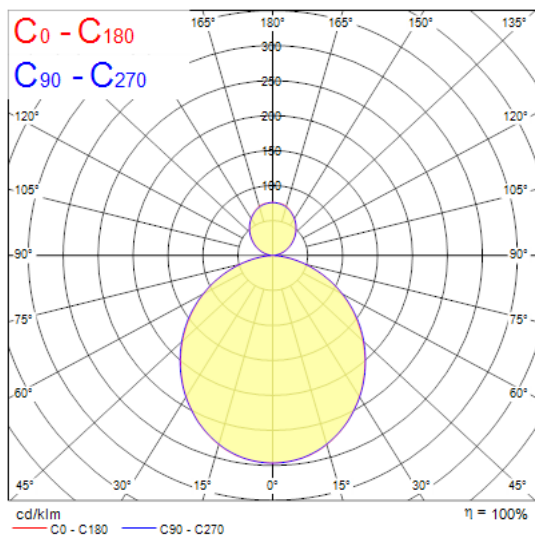

Technical drawings

