





Features

- A comprehensive range of retrofit tubes with maximum effective irradiance of 0.3 W/m². Short tanning times are maintained. Suits both professional salon and domestic users.

Product Overview

Product name	PureSun 100W 1, 3%
Technology	Fluorescent
Cap/Base	G13
Fixture rating	Open
Wattage (W)	100.00
Product EAN number	5410288711812

Technical drawings

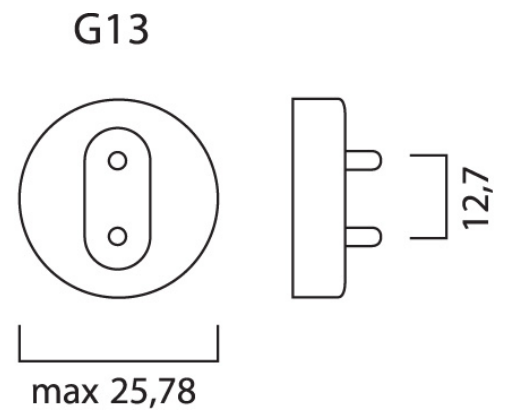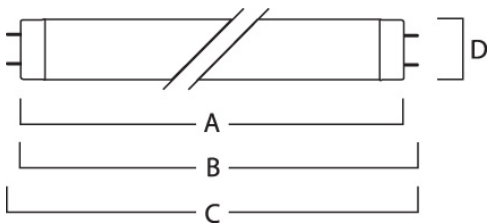

Data table

GENERAL DATA

Product name	PureSun 100W 1, 3%
Technology	Fluorescent
Cap/Base	G13
Fixture rating	Open

OPTICAL DATA

UV-A flux	27
Sun Erythema Factor	6
Typical radiation strength	17
Tanning Time ST3	20
UV code	100-O-17/3.0
Adjustable chromaticity	N

ELECTRICAL DATA

Wattage (W)	100.00
Control gear required	No

LIFETIME DATA

Average life (Rated) (h)	600
--------------------------	-----

PHYSICAL DATA

Nominal Product Length (mm)	1800.0
Nominal Product Diameter (mm)	38
Max. Length base to base (mm) - A	1763.8
Length base to pin Min-Max (mm) - B	1768.5-1770.9
Max. Lamp Length (mm) - C/L	1778.0
Max. Lamp Diameter (mm) - D	40.5
Weight (kg)	0.408

PACKAGING

Single packaging type	Carton
Product EAN number	5410288711812
Packaging single width (cm)	4.3
Packaging single depth (cm)	4.1
DUN14 (outer)	15410288711819
Packaging outer length / height (cm)	181.0

SAFETY DATA

Lamp mercury content (mg)	9.00
Special purpose lamp	Yes
Dry applications use only	No
Suitable for household illumination	No