


Walraven BISMAT® 2000 (M8/10) 2-screw

(A0524)

for steel, copper, cast iron and plastic (multilayer) pipe

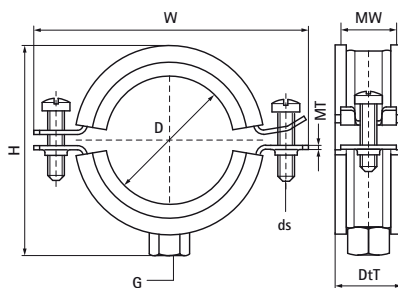

Features & benefits

- two-screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
3403064	57 - 64	DN 50	2	M8/M10	107 x 90 x 23	23 x 2.00	M6	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	520
3403070	64 - 70	-	-	M8/M10	115 x 56 x 23	23 x 2.00	M6	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	520
3403080	73 - 80	DN 65	2½	M8/M10	125 x 108 x 23	23 x 2.00	M6	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	520
3403091	83 - 91	DN 80	3	M8/M10	136 x 120 x 25	25 x 2.50	M6	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	935
3403105	100 - 105	-	-	M8/M10	152 x 136 x 25	25 x 2.50	M6	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	935
3403114	114	DN 100	4	M8/M10	159 x 143 x 25	25 x 2.50	M6	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	935
3403119	116 - 119	-	-	M8/M10	164 x 150 x 25	25 x 2.50	M6	ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	935
3403125	122 - 125	-	-	M8/M10	172 x 159 x 25	25 x 2.50	M6	ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	935
3403141	133 - 141	DN 125	5	M8/M10	187 x 180 x 25	25 x 2.50	M6	ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	935