


# Beacon LED XL Muse

BEACON XL MUSE 4K O/B DIM L3 WHT  
2059321



## Product features

- 2059321 BEACON XL MUSE 4K O/B DIM L3 WHT Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 10° spot to a 70° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 10° spot to 70° flood, optics: aspheric glass lens, colour temperature: 4000K neutral white, total system power: 41W, total fixture output: 2884lm, luminaire efficacy: 70lm/W, LOR: 100%, super high colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1050mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.95, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal...

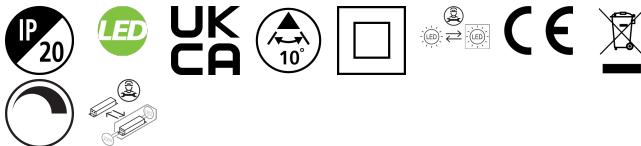


## PRODUCT OVERVIEW

Product name	BEACON XL MUSE 4K O/B DIM L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Useful luminous flux (Fuse)	2884
Fixture luminous flux (lm)	2884
Luminaire efficacy (lm/W)	70
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Beam Angle (°)	10
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	5
Housing colour	White
IP rating	IP20
Product EAN number	5025768593217

## Beacon LED XL Muse

*BEACON XL MUSE 4K O/B DIM L3 WHT*  
2059321

### PHOTOMETRY

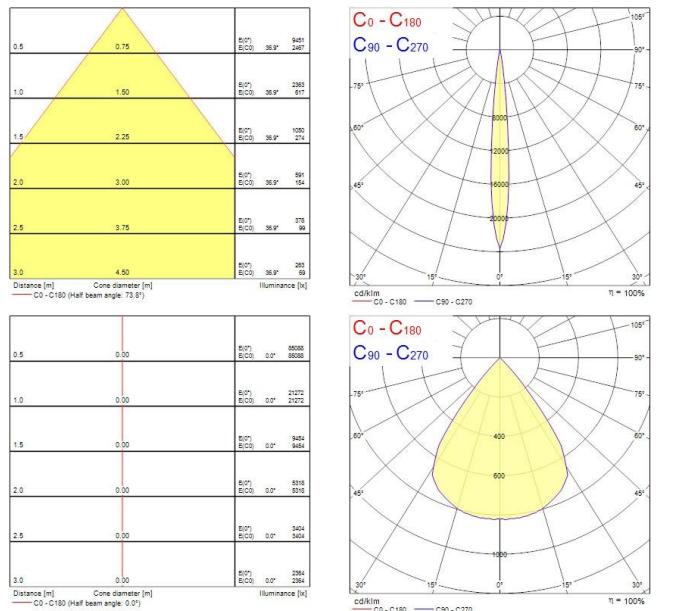

### TECHNICAL DRAWINGS

