



### Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, CRI80, Non-dimmable, 7300lm, 51W, 143lm/W, Symmetrical Wide beam, 100.000hrs L70B50 lifespan, 330 x 231 x 68mm (LxWxD) dimensions, 2.1kg weight, RAL9017 Traffic Black color.


### Product Overview

Product name	Kalani IP66 7KLM 830 WB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579610
Fixture luminous flux (lm)	7300
Luminaire efficacy (lm/W)	143
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Beam Angle (°)	Not applicable
Photobiological Risk Group	RG1
Total power consumption (W)	51
Electrical protection	Class I
Control gear type	LED driver constant current

## Kalani IP66 7KLM 830 WB 0056700

Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9017 - Traffic black
IP rating	IP66
IK rating	IK08
Product EAN number	5410288567006
Warranty	5 years
Dimming method	N/A

### Photometry

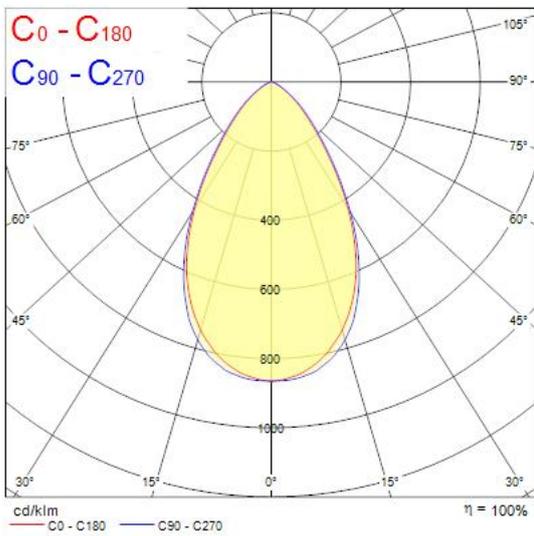

### Technical drawings

