


Sylveo RGBW Sylveo RGBW IP66 100W ASYM SIL 0048017



Product features

- Exterior RGBW Floodlight with integrated LED technology; stand alone or DMX512 controlled; Aluminium housing; RAL9006; 100-240V; Drive current: 3800 mA; 100 W; 4850 lm; 49 lm/W; A++ A+ A; 333x290x99 mm (LxWxH); IK08; IP66; Class I; 50000 hrs

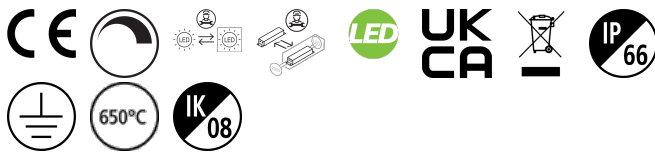


PRODUCT OVERVIEW

Product name	Sylveo RGBW IP66 100W ASYM SIL
Technology	LED
Housing	Aluminium
Environment	External
General application	Hospitality, Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Useful luminous flux (Fuse)	4850
Fixture luminous flux (lm)	4850
Luminaire efficacy (lm/W)	49
Colour Code	N/A
Light colour	RGBW
Beam Angle (°)	65 x 140
Photobiological Risk Group	RG1
Total power consumption (W)	100
Electrical protection	Class I
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9006 - Aluminium
IP rating	IP66
IK rating	IK08
Product EAN number	5410288480176

PHOTOMETRY

Sylveo RGBW Sylveo RGBW IP66 100W ASYM SIL 0048017

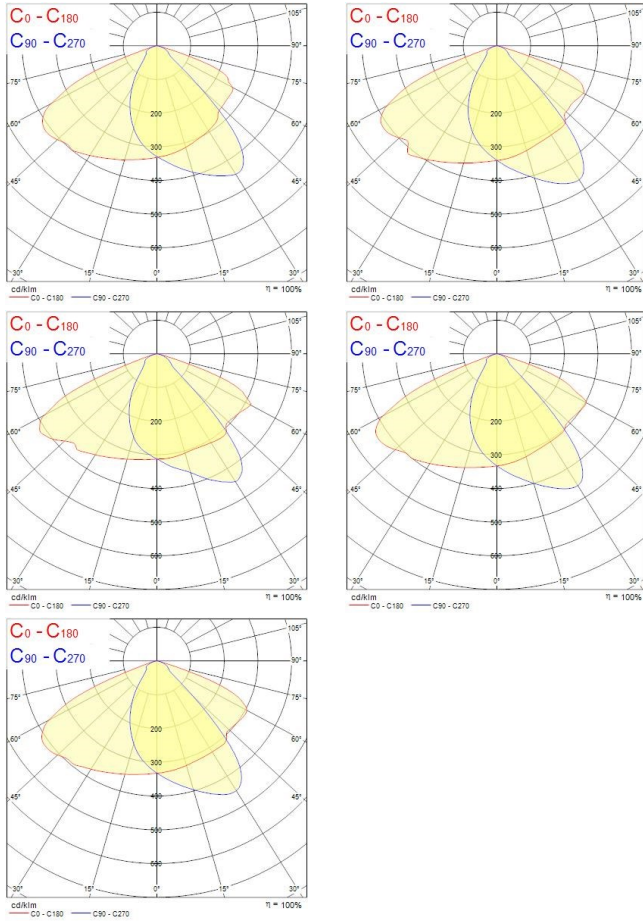

TECHNICAL DRAWINGS

