




### Features

- Exterior RGBW Floodlight with integrated LED technology; stand alone or DMX512 controlled; Aluminium housing; RAL9006; 100-240V; Drive current: 3800 mA; 100 W; 4850 lm; 49 lm/W; A++ A + A; 333x290x99 mm (LxWxH); IK08; IP66; Class I; 50000 hrs

### Product Overview

Product name	Sylveo RGBW IP66 100W ASYM SIL
Technology	LED
Housing	Aluminium
Environment	External
General application	Hospitality, Museums & Galleries, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	4850
Luminaire efficacy (lm/W)	49
Light colour	RGBW
Beam Angle (°)	65 x 140
Photobiological Risk Group	RG1
Total power consumption (W)	100
Electrical protection	Class I
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Product EAN number	5410288480176
Warranty	5 years
Colour Code	N/A
Useful luminous flux (#use)	4850

### Photometry

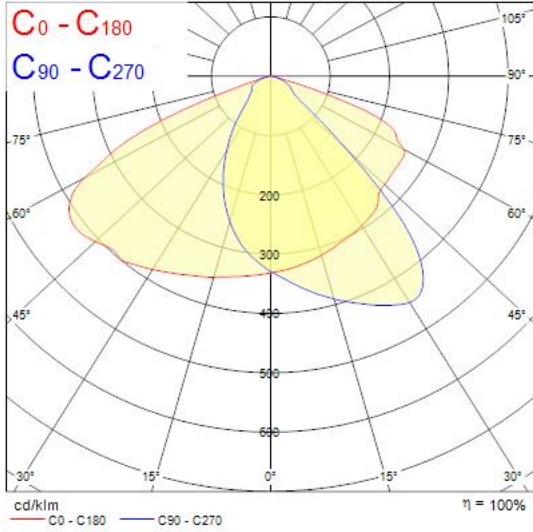

### Technical drawings

