



### Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, CRI80, Non-dimmable, 27000lm, 198W, 136lm/W, Asymmetrical Wide beam, 100.000hrs L70B50 lifespan, 450 x 335 x 75mm (LxWxD) dimensions, 5kg weight, RAL9017 Traffic Black color.




### Product Overview

Product name	Kalani IP66 28KLM 830 ASYM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579614
Fixture luminous flux (lm)	27000
Luminaire efficacy (lm/W)	136
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	65x120
Photobiological Risk Group	RG1
Total power consumption (W)	198
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Low (6% - 20%)


## Kalani IP66 28KLM 830 ASYM 0056707

Housing colour	RAL 9017 - Traffic black
IP rating	IP66
IK rating	IK08
Product EAN number	5410288567075
Warranty	5 years
Dimming method	N/A

### Photometry

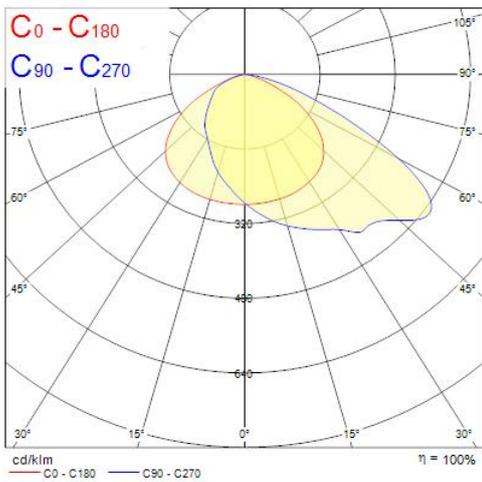

### Technical drawings

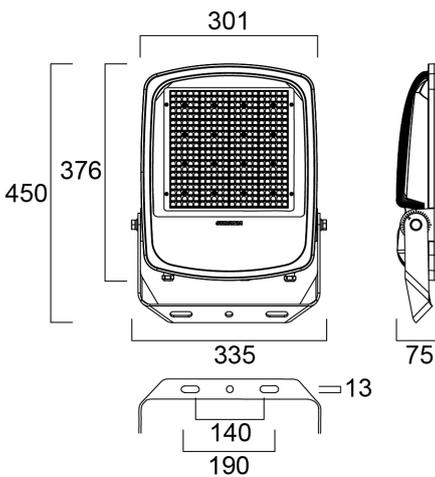

### Data table

#### GENERAL DATA

Product name	Kalani IP66 28KLM 830 ASYM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001744
E-number FI	4579614
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	27000
Luminaire efficacy (lm/W)	136
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	65x120
Distribution type	Asymmetric
Photobiological Risk Group	RG1

#### ELECTRICAL DATA

Total power consumption (W)	198
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I

## Kalani IP66 28KLM 830 ASYM 0056707

Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	840
Inrush Current (A)	80
Inrush Duration ( $\mu$ s)	350
Glow Wire Test ( $^{\circ}$ C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	6
Max. products per 13A C Breaker	8
Max. products per 16A C Breaker	10
Max. products per 20A C Breaker	12
Max. products per 10A B Breaker	5
Max. products per 13A B Breaker	7
Max. products per 16A B Breaker	8
Max. products per 20A B Breaker	10
Mains surge immunity (differential mode -> L-N) (kV)	10
Mains surge immunity (common mode -> L/N - GND) (kV)	10
Connectable conductor cross section - Min (mm <sup>2</sup> )	1
Connectable conductor cross section - Max (mm <sup>2</sup> )	1

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B50	97000
Lifespan L80 B20	89000

### PHYSICAL DATA

## Kalani IP66 28KLM 830 ASYM 0056707

Housing colour	RAL 9017 - Traffic black
IP rating	IP66
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	Glass
Reflector finish	Matt
Nominal Product Length (mm)	450
Nominal Product Width (mm)	335
Nominal Product Height (mm)	75
Weight (kg)	5.0

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288567075
Packaging single length / height (cm)	50.5
Packaging single width (cm)	38.0
Packaging single depth (cm)	14.0
DUN14 (outer)	05410288567075
Units per outer package	1
Packaging outer length / height (cm)	50.5
Packaging outer width (cm)	38.0
Packaging outer depth (cm)	14.0

### SAFETY DATA

Optimal operating condition (°C)	-30-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No