


Data Sheet | Item Number: 706-5030/400-200

System cable; for GE Fanuc 9030; 4 analog inputs; Length: 2 m; Conductor cross-section: 0.25 mm²

<https://www.wago.com/706-5030/400-200>

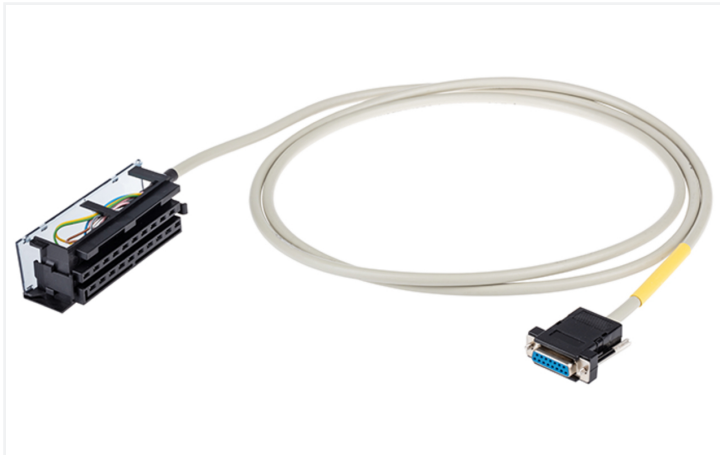

Color coding acc. to DIN VDE 47100	15 poles Sub-D connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0+	3	+1
Brown	2	0-	5	-1
Green	3	1+	4	+2
Yellow	4	1-	6	-2
Grey	5	2+	13	+3
Pink	6	2-	15	-3
Blue	7	3+	14	+4
Red	8	3-	16	-4
Black	9	nc	nc	nc
Violet	10	nc	nc	nc
Grey-Pink	11	nc	nc	nc
Red-Blue	12	nc	nc	nc
White-Green	13	nc	nc	nc
Brown-Green	14	nc	nc	nc
White-Yellow	15	nc	nc	nc
Shield		Connected to Sub-D		

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data	
Inputs/outputs	4 analog inputs
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Compatibility	
GE Fanuc	
GE Fanuc 9030	IC693 ALG220 IC693 ALG221

Connection Data

Cable type	LiYCY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	D-subminiature female connector
Pole number 1	15
Connection type	System
Wire cross-section	0.25 mm ²

Connection 2

Connector	GeFanuc IC 693 ACC 311
Pole number	20
Connection type	System
Wire cross-section	0.25 mm ²

Physical data

Cable length	2 m
--------------	-----

Material data

Fire load	0 MJ
Weight	1.1 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
GTIN	4055143045605
Customs tariff number	85444290900

Product Classification

UNSPSC	26121604
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-5030/400-200



Documentation

System Description

WAGO System Wiring,
Selection Guide

pdf
533.15 KB

