




IMMERSION HEATER

SUPPLIER: THERMOWATT
REFERENCE: R1E14-TW1.5KWRTS3
DRAWING: RT-1436
LOADING: 1.5kW
VOLTAGE: 230V~
MATERIAL: INCOLOY 800
FLANGE: 1-1/2"
CORD LENGTH: 1000mm
INGRESS PROTECTION: IP 65
CONTROL TEMPERATURE: 75 °C
SAFETY TEMPERATURE: 95 °C
APPROVALS: IMQ
MARKING: CE

PACKAGING: CARDBOARD BOX 500X150X150mm
CONTROL WRAPPED IN BLISTER PADDING
INCLUDING: INSTRUCTIONS 09443
INCLUDING O-RING






ALL DELIVERABLES NEED TO BE ACCORDING ROHS II AND REACH

size: A4	scale: 2:1	proj.nr.:	repl.:				
projection		remarks:					
tolerances (u.o.s.) dimensions: REF		material:		2		(240816)	LSN
holes : angular : check : ☐		descr: VERW. ELEM. 1.5kW HEATING ELEM. 1.5kW		1		231215	LSN
				15100002			
				page 1 of 1			

Pos.	Descrizione	Quantità	Unità	Pos.	Descrizione	Quantità	Unità
1	1	1		1	1	1	
2	2	2		2	2	2	
3	3	3		3	3	3	
4	4	4		4	4	4	
5	5	5		5	5	5	
6	6	6		6	6	6	
7	7	7		7	7	7	
8	8	8		8	8	8	
9	9	9		9	9	9	
10	10	10		10	10	10	
11	11	11		11	11	11	
12	12	12		12	12	12	
13	13	13		13	13	13	
14	14	14		14	14	14	
15	15	15		15	15	15	
16	16	16		16	16	16	
17	17	17		17	17	17	
18	18	18		18	18	18	
19	19	19		19	19	19	
20	20	20		20	20	20	
21	21	21		21	21	21	
22	22	22		22	22	22	
23	23	23		23	23	23	
24	24	24		24	24	24	
25	25	25		25	25	25	
26	26	26		26	26	26	
27	27	27		27	27	27	
28	28	28		28	28	28	
29	29	29		29	29	29	
30	30	30		30	30	30	
31	31	31		31	31	31	
32	32	32		32	32	32	
33	33	33		33	33	33	
34	34	34		34	34	34	
35	35	35		35	35	35	
36	36	36		36	36	36	
37	37	37		37	37	37	
38	38	38		38	38	38	
39	39	39		39	39	39	
40	40	40		40	40	40	
41	41	41		41	41	41	
42	42	42		42	42	42	
43	43	43		43	43	43	
44	44	44		44	44	44	
45	45	45		45	45	45	
46	46	46		46	46	46	
47	47	47		47	47	47	
48	48	48		48	48	48	
49	49	49		49	49	49	
50	50	50		50	50	50	
51	51	51		51	51	51	
52	52	52		52	52	52	
53	53	53		53	53	53	
54	54	54		54	54	54	
55	55	55		55	55	55	
56	56	56		56	56	56	
57	57	57		57	57	57	
58	58	58		58	58	58	
59	59	59		59	59	59	
60	60	60		60	60	60	
61	61	61		61	61	61	
62	62	62		62	62	62	
63	63	63		63	63	63	
64	64	64		64	64	64	
65	65	65		65	65	65	
66	66	66		66	66	66	
67	67	67		67	67	67	
68	68	68		68	68	68	
69	69	69		69	69	69	
70	70	70		70	70	70	
71	71	71		71	71	71	
72	72	72		72	72	72	
73	73	73		73	73	73	
74	74	74		74	74	74	
75	75	75		75	75	75	
76	76	76		76	76	76	
77	77	77		77	77	77	
78	78	78		78	78	78	
79	79	79		79	79	79	
80	80	80		80	80	80	
81	81	81		81	81	81	
82	82	82		82	82	82	
83	83	83		83	83	83	
84	84	84		84	84	84	
85	85	85		85	85	85	
86	86	86		86	86	86	
87	87	87		87	87	87	
88	88	88		88	88	88	
89	89	89		89	89	89	
90	90	90		90	90	90	
91	91	91		91	91	91	
92	92	92		92	92	92	
93	93	93		93	93	93	
94	94	94		94	94	94	
95	95	95		95	95	95	
96	96	96		96	96	96	
97	97	97		97	97	97	
98	98	98		98	98	98	
99	99	99		99	99	99	
100	100	100		100	100	100	

+ A termini di legge ci riserviamo
 il diritto di modificare
 senza preavviso le
 caratteristiche
 tecniche e di
 prezzo di questo
 prodotto.

Pos.	Descrizione	Quantità	Unità	Pos.	Descrizione	Quantità	Unità
1	1	1		1	1	1	
2	2	2		2	2	2	
3	3	3		3	3	3	
4	4	4		4	4	4	
5	5	5		5	5	5	
6	6	6		6	6	6	
7	7	7		7	7	7	
8	8	8		8	8	8	
9	9	9		9	9	9	
10	10	10		10	10	10	
11	11	11		11	11	11	
12	12	12		12	12	12	
13	13	13		13	13	13	
14	14	14		14	14	14	
15	15	15		15	15	15	
16	16	16		16	16	16	
17	17	17		17	17	17	
18	18	18		18	18	18	
19	19	19		19	19	19	
20	20	20		20	20	20	
21	21	21		21	21	21	
22	22	22		22	22	22	
23	23	23		23	23	23	
24	24	24		24	24	24	
25	25	25		25	25	25	
26	26	26		26	26	26	
27	27	27		27	27	27	
28	28	28		28	28	28	
29	29	29		29	29	29	
30	30	30		30	30	30	
31	31	31		31	31	31	
32	32	32		32	32	32	
33	33	33		33	33	33	
34	34	34		34	34	34	
35	35	35		35	35	35	
36	36	36		36	36	36	
37	37	37		37	37	37	
38	38	38		38	38	38	
39	39	39		39	39	39	
40	40	40		40	40	40	
41	41	41		41	41	41	
42	42	42		42	42	42	
43	43	43		43	43	43	
44	44	44		44	44	44	
45	45	45		45	45	45	
46	46	46		46	46	46	
47	47	47		47	47	47	
48	48	48		48	48	48	
49	49	49		49	49	49	
50	50	50		50	50	50	
51	51	51		51	51	51	
52	52	52		52	52	52	
53	53	53		53	53	53	
54	54	54		54	54	54	
55	55	55		55	55	55	
56	56	56		56	56	56	
57	57	57		57	57	57	
58	58	58		58	58	58	
59	59	59		59	59	59	
60	60	60		60	60	60	
61	61	61		61	61	61	
62	62	62		62	62	62	
63	63	63		63	63	63	
64	64	64		64	64	64	
65	65	65		65	65	65	
66	66	66		66	66	66	
67	67	67		67	67	67	
68	68	68		68	68	68	
69	69	69		69	69	69	
70	70	70		70	70	70	
71	71	71		71	71	71	
72	72	72		72	72	72	
73	73	73		73	73	73	
74	74	74		74	74	74	
75	75	75		75	75	75	
76	76	76		76	76	76	
77	77	77		77	77	77	
78	78	78		78	78	78	
79	79	79		79	79	79	
80	80	80		80	80	80	
81	81	81		81	81	81	
82	82	82		82	82	82	
83	83	83		83	83	83	
84	84	84		84	84	84	
85	85	85		85	85	85	
86	86	86		86	86	86	
87	87	87		87	87	87	
88	88	88		88	88	88	
89	89	89		89	89	89	
90	90	90		90	90	90	
91	91	91		91	91	91	
92	92	92		92	92	92	
93	93	93		93	93	93	
94	94	94		94	94	94	
95	95	95		95	95	95	
96	96	96		96	96	96	
97	97	97		97	97	97	
98	98	98		98	98	98	
99	99	99		99	99	99	
100	100	100		100	100	100	

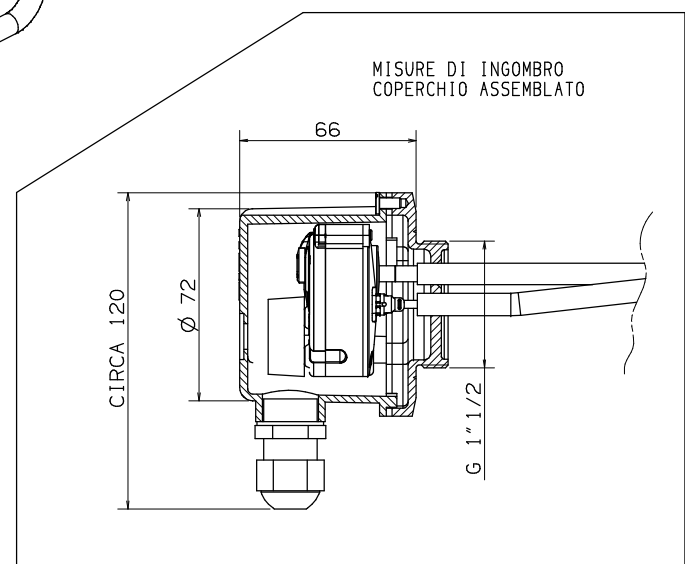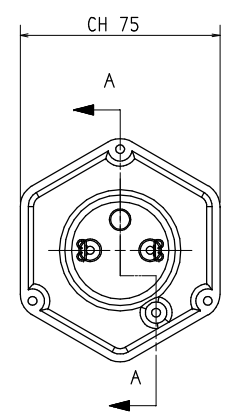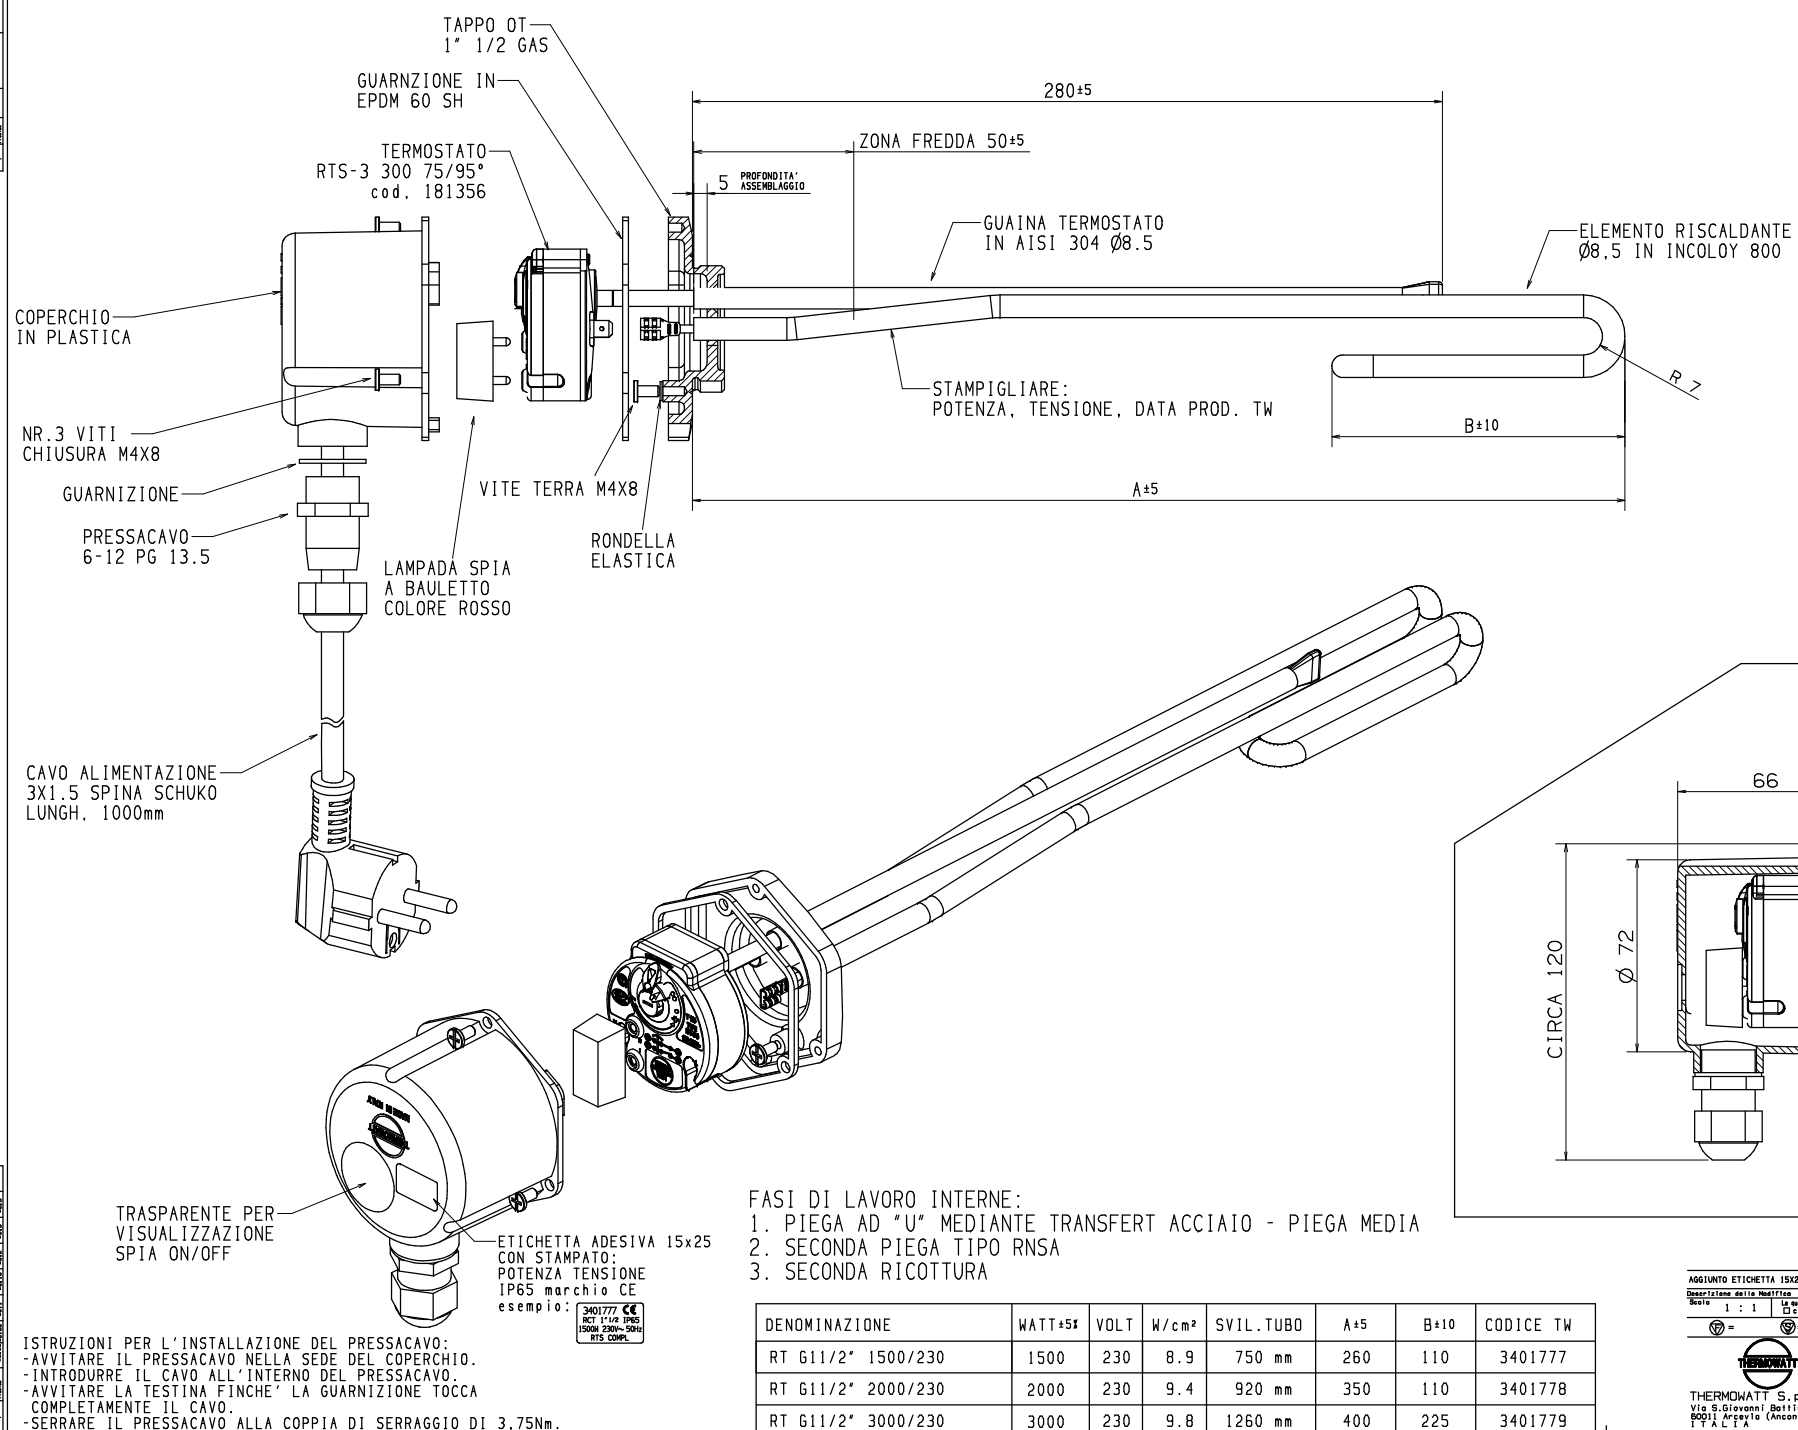

ISTRUZIONI PER L'INSTALLAZIONE DEL PRESSACAVO:
 -AVVITARE IL PRESSACAVO NELLA SEDE DEL COPERCHIO.
 -INTRODURRE IL CAVO ALL'INTERNO DEL PRESSACAVO.
 -AVVITARE LA TESTINA FINCHE' LA GUARNIZIONE TOCCA
 COMPLETAMENTE IL CAVO.
 -SERRARE IL PRESSACAVO ALLA COPPIA DI SERRAGGIO DI 3,75Nm.

ETICHETTA ADESIVA 15x25
 CON STAMPATO:
 POTENZA TENSIONE
 IP65 marchio CE
 esempio:
 3401777 CE
 RT 1" 1/2 1500 230V-50Hz
 RT3 COME

- FASI DI LAVORO INTERNE:
1. PIEGA AD "U" MEDIANTE TRANSFERT ACCIAIO - PIEGA MEDIA
 2. SECONDA PIEGA TIPO RNSA
 3. SECONDA RICOTTURA