


## GLOBAL TRAC PULSE X FEED BLACK XTSC638-2

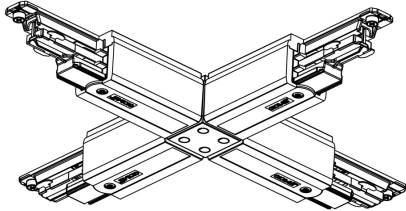

### Features

- Global Trac Pulse accessory - Glass fiber reinforced polycarbonate X-feed that is applicable for three-circuit track systems where the polarity ridge is in the outer side and on the left. Dimensions - 166 x 166 x 33 mm (L x W x H), black (RAL 9005).

### Product Overview

Product name	GLOBAL TRAC PULSE X FEED BLACK
Technology	Accessory
Housing	PC Polycarbonate
Light colour	N/A
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Product EAN number	6410014532659
Warranty	5 years

### Data table

#### GENERAL DATA

Product name	GLOBAL TRAC PULSE X FEED BLACK
Technology	Accessory
Housing	PC Polycarbonate
Operating temperature range (°C)	0°C...+25°C
Warranty	5 years

#### OPTICAL DATA

Light colour	N/A
--------------	-----

## GLOBAL TRAC PULSE X FEED BLACK XTSC638-2

### ELECTRICAL DATA

Control gear required	No
-----------------------	----

### PHYSICAL DATA

Housing colour	RAL 9005 - Jet black
----------------	----------------------

IP rating	IP20
-----------	------

IK rating	IK02
-----------	------

Nominal Product Length (mm)	166
-----------------------------	-----

Nominal Product Width (mm)	166
----------------------------	-----

Weight (kg)	0.32
-------------	------

### PACKAGING

Single packaging type	Plastic
-----------------------	---------

Product EAN number	6410014532659
--------------------	---------------

Packaging single width (cm)	30.0
-----------------------------	------

Packaging single depth (cm)	0.32
-----------------------------	------

DUN14 (outer)	06410014532659
---------------	----------------

Packaging outer length / height (cm)	40.0
--------------------------------------	------

### SAFETY DATA

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----