

Optix Linear Surface 1200 Direct-Indirect

OPTIX LINEAR SURFACE 1200 DI LUMI HCL TW ALU DALI

2023860



Product features

- OPTIX LINEAR SURFACE 1200 D/I LUMI HCL TW ALU DALI is a suspended linear luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. DALI DT8 controlled tunable white light engine. 2700-6200K Tunable White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 2700K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.523; Fidelity Index R :91; Gamut Index R :101. For 4000K - Colour rendering index Ra >96; Melanopic Ratio MEER: 0.821; Fidelity Index R :95; Gamut Index R :101. For 6200K - Colour rendering index Ra >98; Melanopic Ratio MEER: 1.084; Fidelity Index R :96; Gamut Index R :99. For 4000K luminous flux: 3550lm. Power consumption: 38W. Luminaire efficacy: 93lm/W. UGR<16 Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 68,000hrs L80B20 lifespan.




PRODUCT OVERVIEW

Product name	OPTIX LINEAR SURFACE 1200 DI LUMI HCL TW ALU DALI
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	3540
Fixture luminous flux (lm)	3540
Luminaire efficacy (lm/W)	93
Light colour	Tuneable White HCL
CRI (Ra)	95
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	38
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238606

Optix Linear Surface 1200 Direct-Indirect
OPTIX LINEAR SURFACE 1200 DI LUMI HCL TW ALU DALI
2023860

PHOTOMETRY

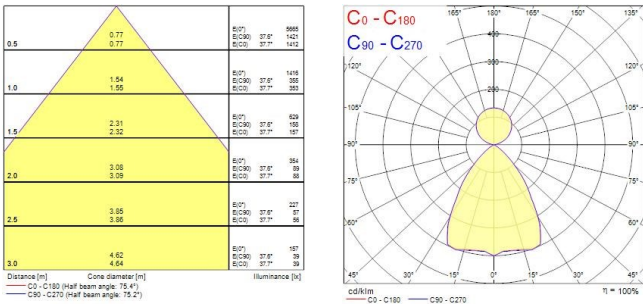

TECHNICAL DRAWINGS

