


# Data Sheet | Item Number: 706-4769/200-300

System cable; for Rockwell Compact Logix; 12 digital outputs for higher voltages;  
Length: 3 m; Conductor cross-section: 0.14 mm<sup>2</sup>

<https://www.wago.com/706-4769/200-300>

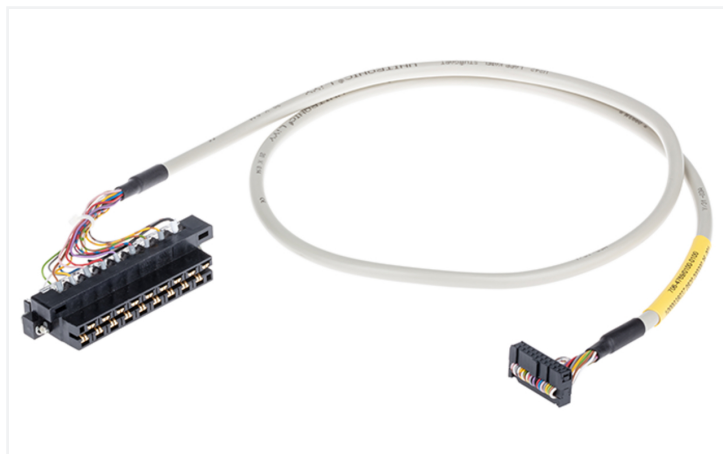

Color coding acc. to DIN VDE 47100 Cable 1; Channel 0-7	Connector WAGO 231 (LA)		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	OUT0.0	2	L0
Brown	2	OUT0.1	3	L1
Green	3	OUT0.2	4	L2
Yellow	4	OUT0.3	5	L3
Grey	5	OUT0.4	6	L4
Pink	6	OUT0.5	7	L5
Blue	7	OUT0.6	8	L6
Red	8	OUT0.7	9	L7
Black	9	L	1+10	Vcc1/ Gnd2
Violet	10	nc	nc	nc

Color coding acc. to DIN VDE 47100 Cable 2; Channel 0-15	Connector WAGO 231 (LB)		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	11	OUT1.0	12	L8
Brown	12	OUT1.1	11	L9
Green	13	OUT1.2	14	L10
Yellow	14	OUT1.3	13	L11
Grey	15	OUT1.4	16	L12
Pink	16	OUT1.5	15	L13
Blue	17	OUT1.6	18	L14
Red	18	OUT1.7	17	L15
Black	19	nc	nc	nc
Violet	20	nc	nc	nc

Similar to illustration

## Notes

### Note

If less than 3 channels are used simultaneously, the maximum current per conductor is 2 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L. If more than 3 channels are used simultaneously, the maximum current per conductor is 0.75 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L.

## Electrical data

Inputs/outputs	12 digital outputs; for higher voltages
Operating voltage	≤ 250 VAC/VDC
Current per wire (max.)	0.75 A

## Compatibility

### Rockwell

Rockwell Compact Logix	1769 - OA16 1769 - OW16
------------------------	----------------------------

## Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

### Connection 1

Pluggable connector	WAGO 231 Series
Pole number 1	10
Connection type	System
Wire cross-section	0.34 mm <sup>2</sup>



Connection 2	
Connector	WAGO 231 Series
Pole number	10
Connection type	System
Wire cross-section	0.34 mm <sup>2</sup>

Connection 3	
Connector	Rockwell RTBN18
Pole number	18
Connection type	System
Wire cross-section	0.34 mm <sup>2</sup>

Physical data	
Cable length	3 m

Material data	
Fire load	0 MJ
Weight	1.1 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
GTIN	4055143048361

Product Classification	
UNSPSC	26121629
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

## Downloads

### Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 706-4769/200-300	<a href="#">↓</a>

## Documentation

### System Description

WAGO System Wiring,  
Selection Guide

pdf  
533.15 KB

