



Features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- 15,000 hours average rated life


Product Overview

| | |
|-----------------------------------|--------------------------------|
| Product name | ToLEDo CANDLE 470LM 865 E14 SL |
| Technology | LED |
| Lamp shape | Candle |
| Cap/Base | E14 |
| Lamp finish | Opal |
| Fixture rating | Open |
| General application | Residential & Consumer |
| ETIM Class | EC001959 |
| Correlated colour temperature (k) | 6500 |
| Light colour | Daylight |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Beam Angle (°) | 240 |
| Photobiological Risk Group | RG1 |
| Wattage (W) | 4.2 |
| Power consumption (W) | 4.2 |
| Control gear type | LED driver constant current |
| Dimmable | No |

ToLEDo CANDLE 470LM 865 E14 SL 0030887

| | |
|-----------------------------|---------------|
| Housing colour | White |
| IP rating | IP20 |
| Product EAN number | 5410288308876 |
| Warranty | 3 years |
| Dimming method | N/A |
| Useful luminous flux (#use) | 470 |

Technical drawings

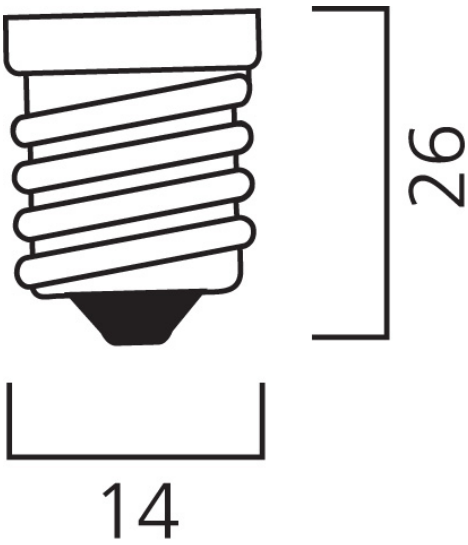

Data table

GENERAL DATA

| | |
|---------------------|--------------------------------|
| Product name | ToLEDo CANDLE 470LM 865 E14 SL |
| Technology | LED |
| Lamp shape | Candle |
| Cap/Base | E14 |
| Lamp finish | Opal |
| Fixture rating | Open |
| General application | Residential & Consumer |
| ETIM Class | EC001959 |

ToLEDo CANDLE 470LM 865 E14 SL 0030887

| | |
|----------|---------|
| Warranty | 3 years |
|----------|---------|

OPTICAL DATA

| | |
|-----------------------------------|----------|
| Useful luminous flux (#use) | 470 |
| Correlated colour temperature (k) | 6500 |
| Light colour | Daylight |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Beam Angle (°) | 240 |
| Photobiological Risk Group | RG1 |

ELECTRICAL DATA

| | |
|---|-----------------------------|
| Power consumption (W) | 4.2 |
| Wattage (W) | 4.2 |
| Equivalent watt (W) | 40 |
| Current (A) | 0.04 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Control gear required | No |
| Control gear type | LED driver constant current |
| No. Of switching cycles before premature failures | >50000 |
| Dimmable | No |
| Dimming method | N/A |
| Inrush Current (A) | 5.5 |
| Inrush Duration (µs) | 125 |
| Lamp Energy Label (class) | E |
| Nominal Frequency (Hz) | 50/60Hz |

LIFETIME DATA

| | |
|------------------|-------|
| Lifespan L70 B50 | 15000 |
|------------------|-------|

PHYSICAL DATA

ToLEDo CANDLE 470LM 865 E14 SL 0030887

| | |
|-------------------------------|-------|
| Housing colour | White |
| IP rating | IP20 |
| Nominal Product Height (mm) | 102 |
| Nominal Product Diameter (mm) | 35 |
| Weight (kg) | 0.016 |

PACKAGING

| | |
|---------------------------------------|----------------|
| Product EAN number | 5410288308876 |
| Packaging single length / height (cm) | 4.5 |
| Packaging single width (cm) | 4.5 |
| Packaging single depth (cm) | 11.0 |
| DUN14 (inner) | 15410288308873 |
| Units per outer package | 6 |
| Packaging outer length / height (cm) | 14.3 |
| Packaging outer width (cm) | 9.7 |
| Packaging outer depth (cm) | 12.2 |

SAFETY DATA

| | |
|-------------------------------------|--|
| Breakage cleaning instructions | Not applicable |
| Special purpose lamp | No |
| Dry applications use only | Yes |
| Suitable for household illumination | Yes |
| Safety message | Not Suitable for totally enclosed fixtures |

SYLVANIA

ToLEDo CANDLE 470LM 865 E14 SL
0030887

Energy label



0030887



5
kWh/1000h



2019/2015



0030887



5
kWh/1000h



2019/2015