


Giotto LED 335
GIOTTO 335 3000K RECESSED EMERGENCY
3034815



Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2225lm, 19.5W, 114lm/W, 3000K, CRI 80, non-dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

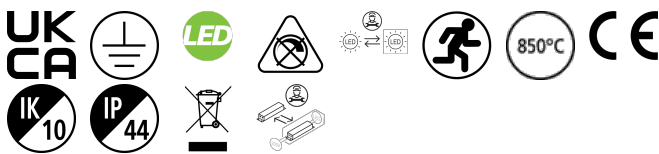

PRODUCT OVERVIEW

Product name	GIOTTO 335 3000K RECESSED EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	2225
Luminous flux (lm)	2225
Luminaire efficacy (lm/W)	114
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	144
Luminous flux (emergency) (lm)	144
Total power consumption (W)	19.5
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971348153

Giotto LED 335

GIOTTO 335 3000K RECESSED EMERGENCY

3034815

DATA TABLE

General data

Product name	GIOTTO 335 3000K RECESSED EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2225
Luminous flux (lm)	2225
Luminaire efficacy (lm/W)	114
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80
Luminous flux (emergency) (lm)	144
Luminous flux (emergency) (lm)	144
Emergency duration (h)	3

Electrical data

Total power consumption (W)	19.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.92
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No

Giotto LED 335

GIOTTO 335 3000K RECESSED EMERGENCY

3034815

Dimming method	N/A
Drive current (mA)	600
Inrush Current (A)	40
Inrush Duration (µs)	400
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	30
Max. products per 20A C Breaker	104
Max. products per 10A B Breaker	31
Max. products per 16A B Breaker	18
Max. products per 20A B Breaker	62
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B10	127500
Lifespan L90 B10	61500

Physical data

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	355
Weight (kg)	1.5
Recessed Depth (mm)	41

Packaging


Single packaging type	Carton
Product EAN number	8711971348153
Packaging single length / height (cm)	35.7
Packaging single width (cm)	35.7
Packaging single depth (cm)	10.6
DUN14 (outer)	08711971348153
Units per outer package	1
Packaging outer length / height (cm)	35.7
Packaging outer width (cm)	35.7
Packaging outer depth (cm)	10.6

Safety data

Optimal operating condition (°C)	1-25
----------------------------------	------

Giotto LED 335
GIOTTO 335 3000K RECESSED EMERGENCY
3034815

PHOTOMETRY

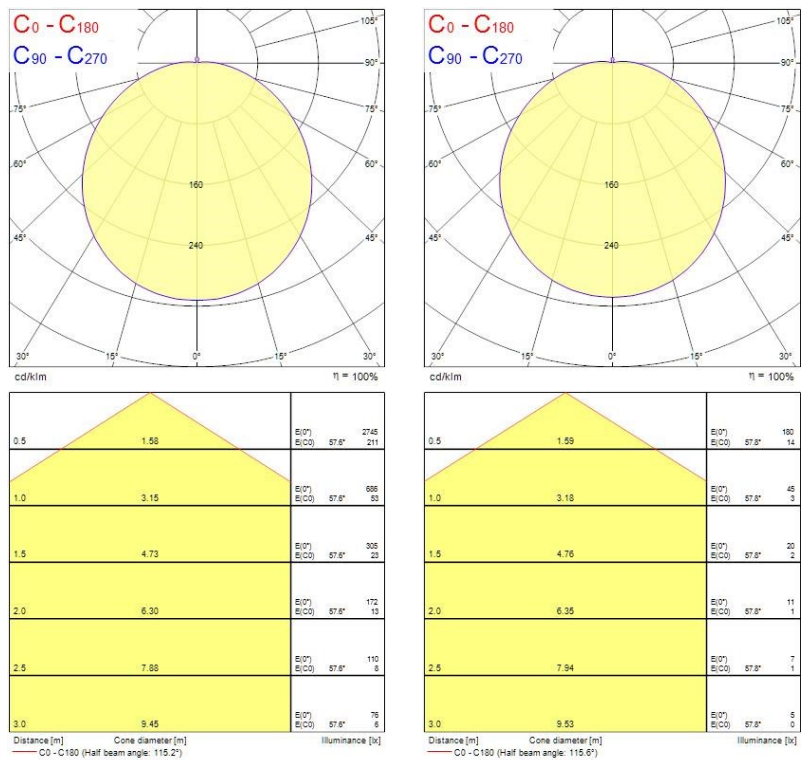

TECHNICAL DRAWINGS

