


Color: ■ gray Similar to illustration

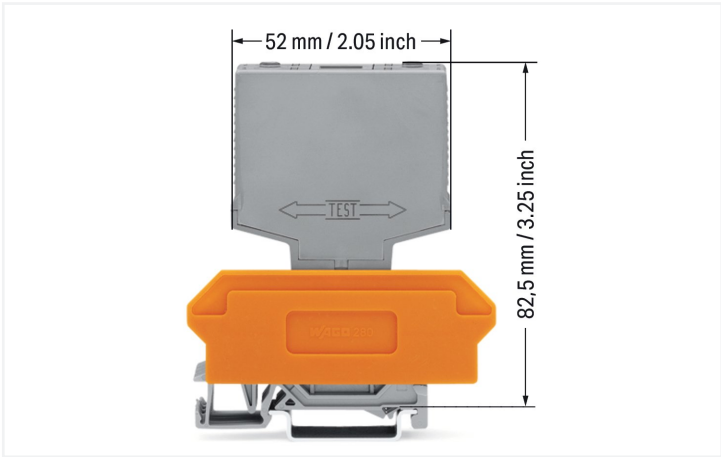

Electrical data	
Nominal operating voltage	230 VAC/VDC
Fuse capacity (max.)	6.3 A
Leakage current in case of a blown fuse	0.5 mA

Safety and protection	
Rated Voltage	250 V
Rated impulse withstand voltage	4 kV
Pollution degree	3

Physical data	
Width	10 mm / 0.394 inches
Height	52 mm / 2.047 inches
Depth from upper-edge of DIN-rail	82.5 mm / 3.346 inches
Note (dimensions)	Depth including carrier terminal block



Mechanical data	
Mounting type	Pluggable module for receptacle terminal blocks
Housing design	Plug for carrier terminal blocks

Material data	
Color	gray
Fire load	0.492 MJ
Weight	14.1 g

Environmental requirements	
Ambient temperature (operation)	-25 ... +40 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-14-11-16
eCl@ss 9.0	27-14-11-16
ETIM 9.0	EC000899
ETIM 8.0	EC000899
PU (SPU)	30 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454376482
Customs tariff number	85363010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates	
General approvals	Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 286-891

↓

Documentation

Bid Text

286-891

19.02.2019

xml

3.17 KB

↓

286-891

02.04.2015

doc

23.50 KB

↓

Instruction Leaflet

pdf

1246.19 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 286-891

↓

CAE data

WSCAD Universe 286-891

↓

ZUKEN Portal 286-891

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marker



Item No.: 209-701
WSB marking card; as card; not stretchable; plain; snap-on type; white

1.1.2 Terminal blocks

1.1.2.1 Terminal block for pluggable modules



Item No.: 280-618
Terminal block for pluggable modules; 4-pole; with 2-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray



Item No.: 280-762
Terminal block for pluggable modules; 4-pole; with 4-conductor terminal blocks; with marker carrier; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray



Item No.: 280-608
Terminal block for pluggable modules; 4-pole; with 4-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com