

## START DOWNLIGHT 205 IP44

START Downlight 205 IP44 2100lm 830  
0030328



### Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 20W, 3000K, Driver Current: 600mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 60x205mm, Class 2, 220-240V. Meets TP(a) requirements.





### PRODUCT OVERVIEW

Product name	START Downlight 205 IP44 2100lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278151
Warranty	5 years
Useful luminous flux (Fuse)	1950
Fixture luminous flux (lm)	2100
Luminous flux (lm)	2100
Luminaire efficacy (lm/W)	100
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303284

## START DOWNLIGHT 205 IP44

*START Downlight 205 IP44 2100lm 830*  
0030328

### PHOTOMETRY

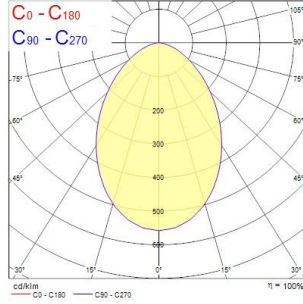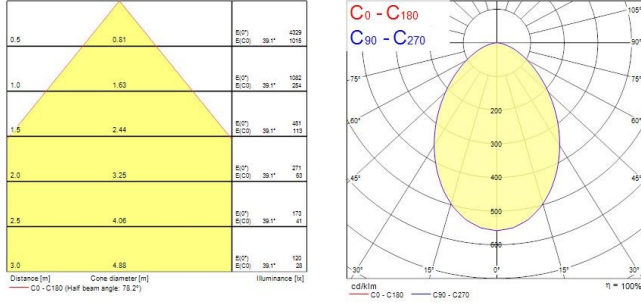

### TECHNICAL DRAWINGS

