
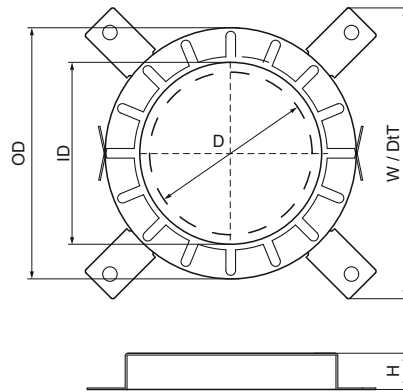


## Walraven Pacifyre® AWM II+ Fire Collar

(U0430)

Innovative fire collar for complex installations of plastic and multi-layer pipes pipes



### Features & benefits

- Zero distance is possible between fire collars
- Built-up fire collar for plastic (combustible) pipes and pipe systems. For apertures in walls (solid walls or flexible walls) and floors with fire protection
- Installation of elbows, pipe couplings or branch pipes into the wall or, directly in, or under the ceiling is possible
- With a fire resistance up to EI 120 U/U
- Installation of telecommunications pipeline or protective piping with up to 2 cables is possible
- The use of PE noise insulation hose up to a thickness of 4 mm of composite natural rubber insulation to a thickness of 43 mm is allowed
- Tested and approved according to EN 1366-3



Product Number	VVS Number	Inner Diameter	Outer Diameter	Total Height	Total Width	Total Depth	Number Of Fixations Needed
Reference letter		ID	OD	H	W	DtT	
Unit description		mm	mm	mm	mm	mm	
2134075077	018067275	83	110	26	106	106	4
2134090092	018067290	100	138	26	132	132	4
2134110112	018067311	120	161	26	155	155	4
2134160160	018067316	169	225	40	220	220	6
2134180180	018067318	184	264	40	264	264	8
2134200200	018067320	204	284	40	284	284	8
2134225225	018067322	239	328	100	500	510	10
2134250250	018067325	264	353	100	500	510	10
2134280280	018067328	289	378	100	500	510	12
2134355355	018067335	370	459	50	453	453	12
2134400400	018067340	415	504	50	503	503	12