

Giotto LED 335

GIOTTO 335 3000K SURFACE EMERGENCY
3034817



Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2225lm, 19.5W, 114lm/W, 3000K, CRI 80, non-dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.



PRODUCT OVERVIEW

Product name	GIOTTO 335 3000K SURFACE EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	2225
Luminous flux (lm)	2225
Luminaire efficacy (lm/W)	114
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	80
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	144
Luminous flux (emergency) (lm)	144
Total power consumption (W)	19.5
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44

Giotto LED 335

GIOTTO 335 3000K SURFACE EMERGENCY

3034817

IK rating	IK10
Product EAN number	8711971348177

DATA TABLE

General data

Product name	GIOTTO 335 3000K SURFACE EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2225
Luminous flux (lm)	2225
Luminaire efficacy (lm/W)	114
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	80
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80
Luminous flux (emergency) (lm)	144
Luminous flux (emergency) (lm)	144
Emergency duration (h)	3

Electrical data

Total power consumption (W)	19.5
Primary Supply/Product voltage - min (V)	198
Primary Supply/Product voltage - max (V)	264
Lamp power factor	0.92
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current

Giotto LED 335

Giotto 335 3000K SURFACE EMERGENCY
3034817

Control gear mounting	Integrated
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Inrush Current (A)	40
Inrush Duration (μs)	400
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	30
Max. products per 20A C Breaker	104
Max. products per 10A B Breaker	31
Max. products per 16A B Breaker	18
Max. products per 20A B Breaker	62
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5
Lifetime data	
Lifespan L70 B50	170000
Lifespan L80 B10	127500
Lifespan L90 B10	61500
Physical data	
Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	335
Weight (kg)	1.5
Packaging	
Single packaging type	Carton
Product EAN number	8711971348177
Packaging single length / height (cm)	35.7
Packaging single width (cm)	35.7
Packaging single depth (cm)	10.6
DUN14 (outer)	08711971348177
Units per outer package	1
Packaging outer length / height (cm)	35.7
Packaging outer width (cm)	35.7
Packaging outer depth (cm)	10.6

Giotto LED 335





GIOTTO 335 3000K SURFACE EMERGENCY
3034817

Safety data

Optimal operating condition (°C)

1-25

PHOTOMETRY

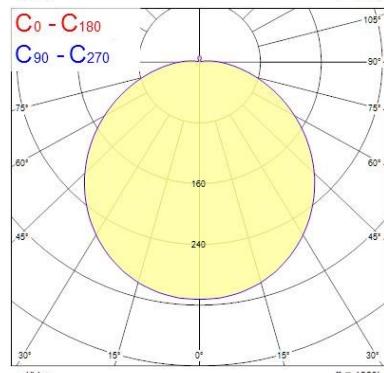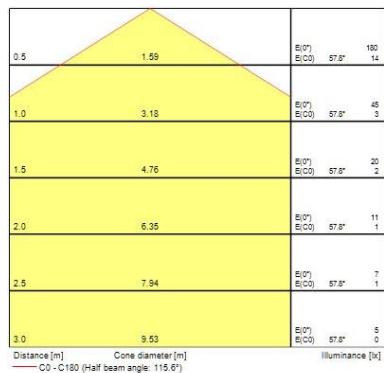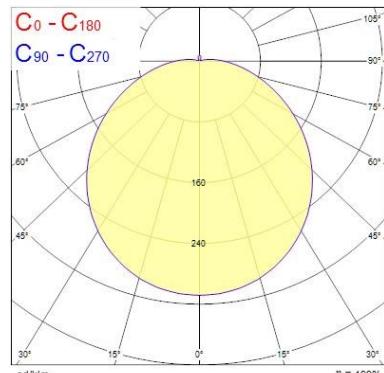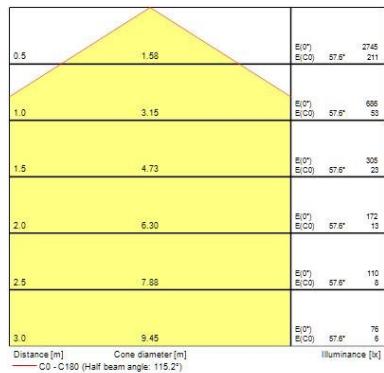

TECHNICAL DRAWINGS

