




Flens afmetingen (mm)	85x75	Type	Inbouwwandcontactdoos met sluiters
Thermodruk met kogel	125 °C (actieve onderdelen) - 70 °C (passieve onderdelen)	IP waarde	IP54
Aant. polen	2P+E	Frequentie	50/60 Hz
Klem aandraaicapaciteit	1-2,5 mm² flexibele kabels - 1,5-2,5 mm² stijve kabels	Bedrijfstemperatuur	-25 +55 °C
Soort bedrading	Met schroeven	Electrocod	2211
Gloeidraadtest	850 °C (actieve onderdelen) - 650 °C (passieve onderdelen)	Kleur	Blauw
Nominale stroom (A)	16	Nominale spanning	200 - 250 V
Standaard	Duits		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not resistant	Limited resistance	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance


DIMENSIONAL

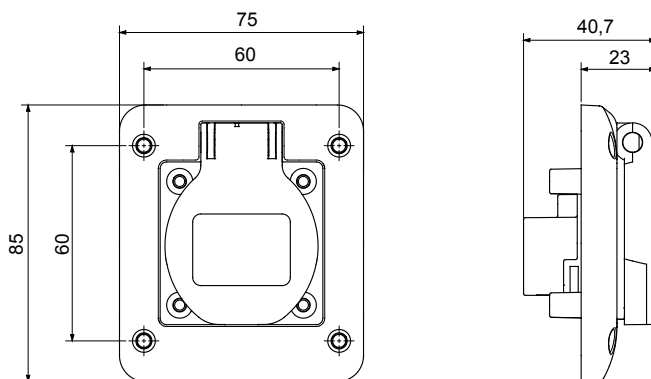

TECHNICAL SYMBOLOGY

IP

IP54



-25 +55 °C



Met schroeven

GWT

850 °C (actieve onderdelen) - 650 °C (passieve onderdelen)

125 °C (actieve onderdelen) - 70 °C (passieve onderdelen)

STANDARDS/APPROVALS

