



The small emergency-stop button: small device, big impact

Compelling all around

The new small emergency-stop button from the RMQ range combines functionality, safety and a unique, compact design. The small E-Stop button is an innovative control element that stands out for its compact size and novel illumination system, as well as for its modern design, proven quality and compatibility with the entire Eaton product range.

Safely, illuminated

The innovative 360° illuminated ring can fulfil a wide range of functions depending on the area of application. Whether as an indicator for actuation of the emergency-stop button, as an indication of the machine status or as a simple style element, the lighting contributes to a significant increase in visibility and thus to improved safety. Thanks to the RGB LED element, it is possible to change between up to seven colours.

Sturdy and safe

The high degree of protection (IP69) makes the device easy to install and use in virtually all environmental conditions. The E-Stop pushbutton is optimally protected against both water and dust.

Maximum flexibility

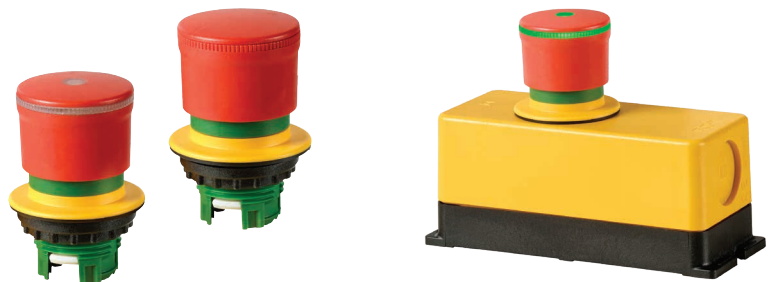
Due to its modularity, the small E-Stop can be integrated with the entire RMQ range and is flexible and easy to integrate into a wide variety of applications thanks to its simple one-hand installation (plug and play). Comprehensive approvals and certificates enable worldwide use.

The perfect size

The compact emergency-stop button is available in diameters of 22 mm and 30 mm. Thanks to its frame size of only 30 mm, it is around 30% smaller than the standard components and fits seamlessly into most applications. It is therefore ideally suited for flat, cutting-edge panels as well as for machines and other applications.

Save time and money

The devices are compatible with the entire Eaton product range, which makes them quick and easy to replace. With the Pushbutton Configurator, countless operating elements can be combined and individually adapted as required. In addition, the configurator simplifies and accelerates the ordering process, since all configurations are stored and can easily be retrieved.


EATON
Powering Business Worldwide

RMQ small E-Stop

Sample pictures



Mounting diameter	Color	Illumination	Unlocking method	Article no.
22 mm		no	pull	M22-PV30 197535
22 mm		no	turn	M22-PVT30 197536
22 mm		yes	pull	M22-PVL30 197537
22 mm		yes	turn	M22-PVLT30 197538
22 mm		no	pull	M22S-PV30* 197539
22 mm		yes	pull	M22S-PVL30* 197541
30 mm		no	pull	M30-PV30 197543
30 mm		no	turn	M30-PVT30 197544
30 mm		yes	pull	M30-PVL30* 197545
30 mm		yes	turn	M30-PVLT30* 197546
30 mm		no	pull	M30S-PV30* 197547
30 mm		yes	pull	M30S-PVL30* 197549

*Devices with a black color must not be used as emergency stops.

Great accessories:

Flat rear NC contact:	M22-FK01 180791
RGB LED:	M22-FLED-RGB 180800
Guard Ring:	M22-XGPV30 198596*
Yellow Enclosure:	M22-FIY1 197231*

*not to be used with M30 variants

At a glance

Technical data

- IP65, IP66 and IP69 degree of protection
- Compatible with Flat Rear contacts
- Optional self-monitoring contacts
- One-hand assembly
- Optional RGB LEDs → 360° illuminated ring that can light up in any color

Variants

- Turn-to-release or pull-to-release
- With or without illuminated ring
- Illuminated lens
- Mounting diameter of 22 mm or 30 mm
- Red or black

Design

- The perfect size, with a button diameter of 30 mm
- Innovative illuminated ring
- Small height of 30 mm
- Blends in harmoniously with the design of existing machines/applications

Features

- Certifications in accordance with EN ISO 13850
- Approvals: CE/UL/CSA/CCC
- Tested to DIN EN 60947-5-5
- TÜV Süd approval

For further information, please consult our **online catalog** and the **Pushbutton Configurator**.

Eaton Industries GmbH
Hein-Moeller-Str. 7-11
D-53115 Bonn/Germany
www.eaton.eu

© 2020 Eaton
All Rights Reserved
Publication No. FL047006EN
December 2020

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



Powering Business Worldwide