


## BAP-H2020: Ball valve with handle Press 20x20

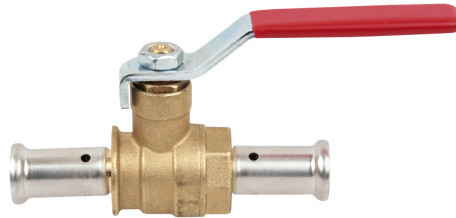

### Commercial information

Brass ball valve with 2 press couplings. Handle has a red coating

#### Basic unit dimensions

Height	70 mm
Length	150 mm
Width	33 mm
Net weight	0.142 kg

#### Certificates

#### Applications

Potable water, Heating, Sanitary, Compressed air

#### Solutions

Building installations, Industry, Utility

## Technical characteristics

Housing material	Brass	Diameter bolt hole	20
Material quality	CuZn40Pb2 (CW617N)	Outer pipe diameter connection 1	20 Millimetre
Surface protection housing	None	Outer pipe diameter connection 2	20 Millimetre
Material ball seal	Ethylene-propylene diene monomer rubber (EPDM)	Medium temperature (continuous)	-10 70 Degrees celsius
Material ball	Brass	Wrench width	0 Millimetre
Surface protection ball	None	Wrench width union nut	0 Millimetre
Material spindle	Steel		
Material primary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)		
Material secondary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)		
Nominal diameter connection 1	DN 10		
Connection 1	Press sleeve		
With coupling connection 1	✓		
Contour code connection 1	TH/BE		
Nominal diameter connection 2	DN 10		
Connection 2	Press sleeve		
With coupling connection 2	✓		
Contour code connection 2	TH/BE		
Sealing	Polytetrafluoroethylene (PTFE)		
With drain valve	✗		
With drain possibility (connection)	✗		
With filter	✗		
With thermometer	✗		
Model	Straight		
With insulation shell	✗		
UL quality mark	✗		
ULC quality mark	✗		
FM quality mark	✗		
LPCB quality mark	✗		
Fire-safe	✗		
Medically clean	✗		
Grease-free	✗		
Operation	Lever handle		
Full bore	✓		
KIWA certified	✗		