

# Optix Linear Surface 1200 Direct-Indirect


## OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU

### 2023857



#### Product features

- OPTIX LINEAR SURFACE 1200 D/I LUMI 4000K ALU is a suspended linear luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. Constant current driver. 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 4000K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.784; Fidelity Index R<sub>93</sub>; Gamut Index R<sub>98</sub>. For 4000K luminous flux: 4000lm. Power consumption: 36W. Luminaire efficacy: 111lm/W. UGR<16 Luminance at 65° <200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 60,000hrs L80B20 lifespan.

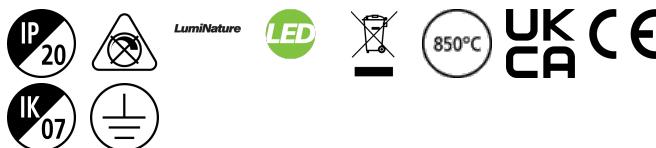


#### PRODUCT OVERVIEW

Product name	OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	4020
Fixture luminous flux (lm)	4020
Luminaire efficacy (lm/W)	112
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238576

#### PHOTOMETRY

# Optix Linear Surface 1200 Direct-Indirect *OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU* 2023857

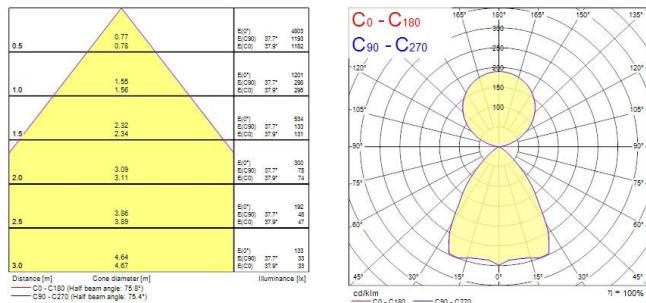

## TECHNICAL DRAWINGS

