

### Features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2350lm, 19.5W, 121lm/W, 4000K, CRI 80, 1-10V dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

### Product Overview


<b>Product name</b>	GIOTTO 335 4000K SURFACE 1-10V EMERGENCY
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting, Wall surface mounted
<b>Environment</b>	Indoor
<b>Fixture luminous flux (lm)</b>	2350
<b>Luminaire efficacy (lm/W)</b>	121
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 26
<b>Photobiological Risk Group</b>	RG0
<b>Luminous flux (emergency) (lm)</b>	155
<b>Total power consumption (W)</b>	19.5
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Control gear mounting</b>	Integrated

# Lumiance

## GIOTTO 335 4000K SURFACE 1-10V EMERGENCY 3034820

LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971348207
Warranty	5 years
Colour Code	840

### Photometry

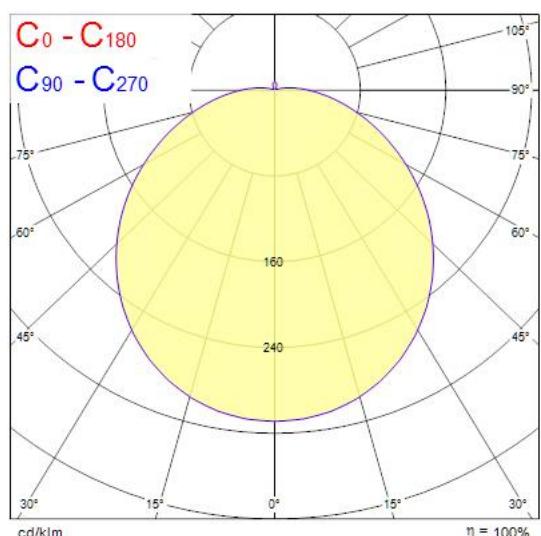

### Technical drawings

