

START DOWNLIGHT 225 IP44


START Downlight 225 IP44 2350lm 830

0030330



Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 23W, 3000K, Driver Current: 630mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V. Meets TP(a) requirements.

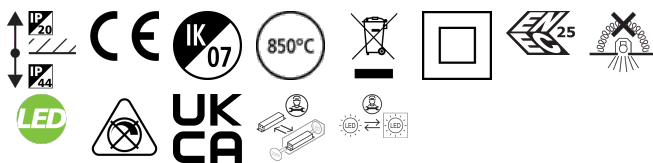


PRODUCT OVERVIEW

Product name	START Downlight 225 IP44 2350lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278155
Warranty	5 years
Useful luminous flux (Fuse)	2275
Fixture luminous flux (lm)	2350
Luminous flux (lm)	2350
Luminaire efficacy (lm/W)	102
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303307

START DOWNLIGHT 225 IP44

START Downlight 225 IP44 2350lm 830
0030330

PHOTOMETRY

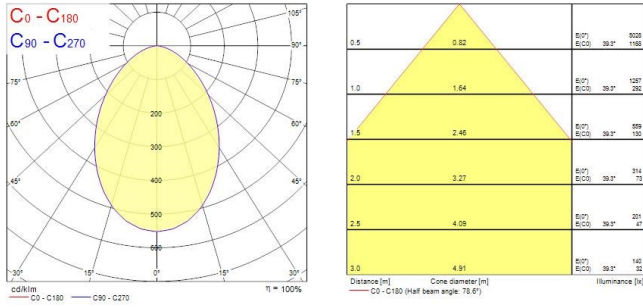

TECHNICAL DRAWINGS

