


## START Downlight Flat IP44 Dimmable 205mm Round Recessed

START Downlight Flat 205 IP44 1550LM 830 DIM  
0054122



### Product features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1550Lm; 91lm/W; 3000K; IP44 rated from the front.

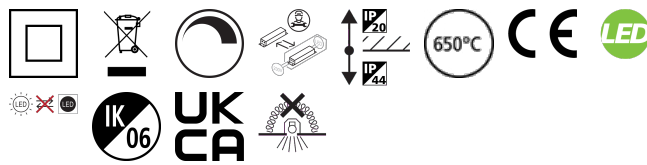


### PRODUCT OVERVIEW

Product name	START Downlight Flat 205 IP44 1550LM 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278497
Warranty	5 years
Useful luminous flux (Fuse)	1550
Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	91
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541228

### PHOTOMETRY

## START Downlight Flat IP44 Dimmable 205mm Round Recessed

*START Downlight Flat 205 IP44 1550LM 830 DIM*  
**0054122**



Distance [m]	Cone diameter [m]	E0° [lx]	E10° [lx]	E30° [lx]	E45° [lx]	E60° [lx]	E75° [lx]	E90° [lx]
0.5	1.43	2227	212	218				
	1.41							
1.0	2.86	859	89	94				
	2.82							
1.5	4.29	239	25	26				
	4.24							
2.0	5.71	145	15	16				
	5.69							
2.5	7.14	89	9	9				
	7.09							
3.0	8.57	62	6	6				
	8.47							

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 180.0°)  
 — C90 - C270 (Half beam angle: 110.0°)

### TECHNICAL DRAWINGS

