




Features

- Back lit LED recessed panel, 4454lm, 31W, 144lm/W, 4000K, Driver Current 275mA, CRI:80, DALI or Switch Dim, IP40, IK02, UGR<21, zintec powder coated steel body, 55,000hrs (L90B10), HxWxD = 595x595x95mm, 3 step MacAdam Ellipse, Class I, 220-240V.

Product Overview

Product name	LYTEPANEL II 600 4K DALI
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
Environment	Internal
Fixture luminous flux (lm)	4454
Luminaire efficacy (lm/W)	143.68
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	31
Electrical protection	Class I
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40
IK rating	IK02
Product EAN number	5025768594320
Warranty	5 years

Photometry

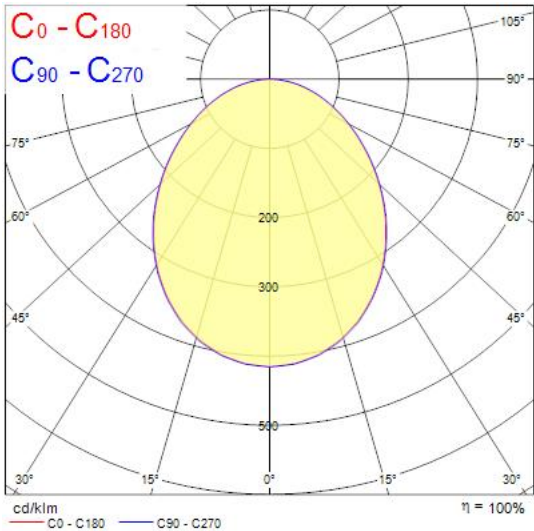

Technical drawings

