

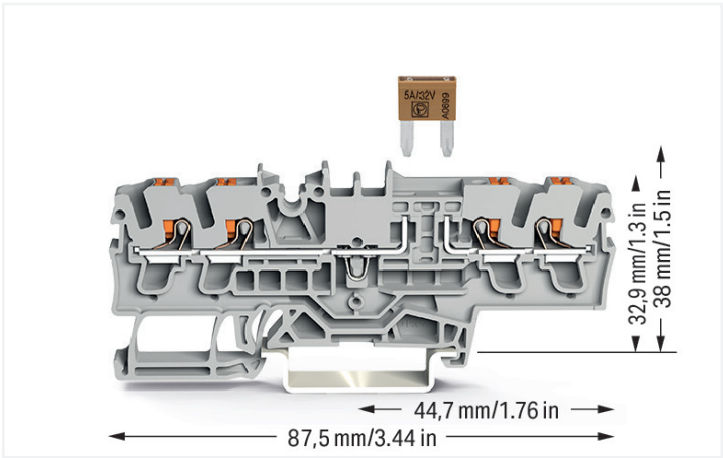


Data Sheet | Item Number: 2202-1881
4-conductor fuse terminal block; for mini-automotive blade-style fuses; per DIN 7258-3f, ISO 8820-3; with test option; with push-button; without blown fuse indication; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray
<https://www.wago.com/2202-1881>

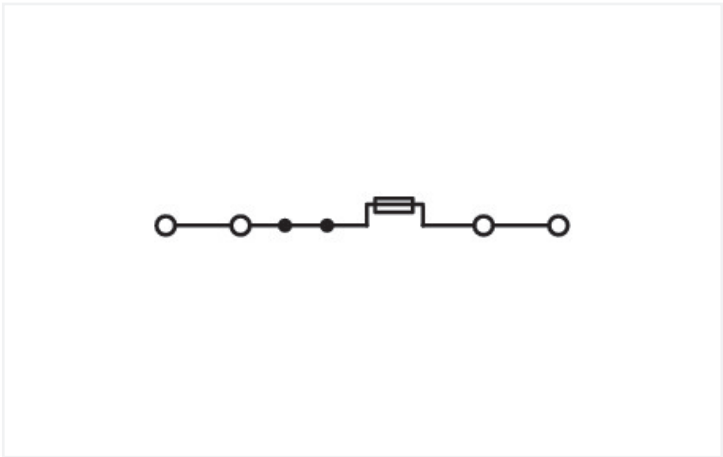

Color: ■ gray

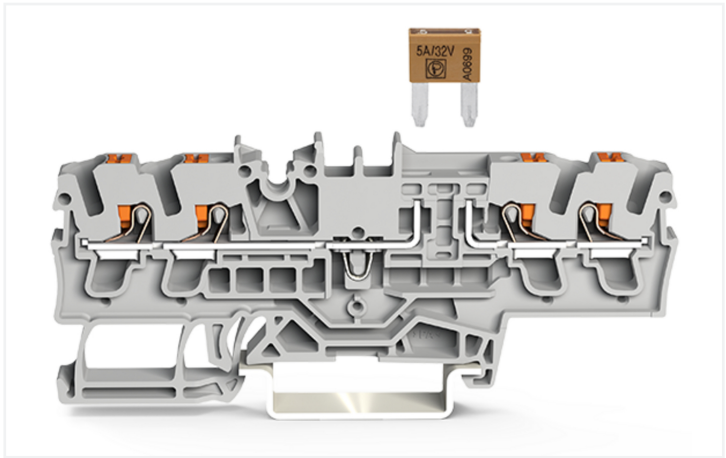

Similar to illustration

Fuse terminal block, 2202 Series, gray

Our fuse terminal block (item number 2202-1881) ensures effortless electrical installations. Ensure that the strip lengths are between 10 mm and 12 mm when connecting conductors to this fuse terminal block. This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Our Push-in CAGE CLAMP® is a universal, maintenance-free connection solution for all conductor types, featuring a winning design: both solid and fine-stranded conductors with ferrules can be directly inserted without the need for tools or any preparation, such as crimping the ferrule. Depending on the conductor type, this fuse terminal block is ideal for conductor cross sections ranging from 0.25 mm² to 4 mm². It comes with one level and four clamping points for connecting two potentials. The gray housing is made of polyamide (PA66) for insulation. These function terminal blocks are mounted using DIN-35 rails..

Electrical data				
Ratings per		IEC/EN 60947-7-3		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		400 V	-	-
Rated surge voltage		6 kV	-	-
Rated current		10 A	-	-
Ratings per IEC/EN – Notes				
Ratings (note)		Electrical ratings are given by the fuse.		



Ratings per IEC/EN 2	
Ratings (note)	Blade-style fuses: Observe touch-proof protection for 42 V and higher voltages! • 10 A (individual arrangement) • 5 A (block arrangement)

Approvals per		UL 1059		
Use group	B	C	D	
Rated voltage	300 V	300 V	-	
Rated current	10 A	10 A	-	

Approvals per		CSA 22.2 No 158		
Use group	B	C	D	
Rated voltage	300 V	300 V	-	
Rated current	10 A	10 A	-	

General information	
Fuse receptacle	pluggable
Fuse type	Mini flat plug-in fuse; 10.9 x 3.6 x 16.3 mm

Connection data			
Clamping units	4	Connection 1	
Total number of potentials	2	Connection technology	Push-in CAGE CLAMP®
Number of levels	1	Actuation type	Push-button
Number of jumper slots	2	Connectable conductor materials	Copper
		Nominal cross-section	2.5 mm²
		Solid conductor	0.25 ... 4 mm² / 22 ... 12 AWG
		Solid conductor; push-in termination	0.75 ... 4 mm² / 18 ... 12 AWG
		Fine-stranded conductor	0.25 ... 4 mm² / 22 ... 12 AWG
		Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm² / 22 ... 14 AWG
		Fine-stranded conductor; with ferrule; push-in termination	1 ... 2.5 mm² / 18 ... 14 AWG
		Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
		Strip length	10 ... 12 mm / 0.39 ... 0.47 inches
		Wiring direction	Front-entry wiring

Physical data	
Width	5.2 mm / 0.205 inches
Height	87.5 mm / 3.445 inches
Depth from upper-edge of DIN-rail	32.9 mm / 1.295 inches

Mechanical data	
Mounting type	DIN-35 rail
Marking level	Center/side marking

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.229 MJ
Actuator color	orange
Weight	9.8 g



Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data	
ETIM 9.0	EC000899
ETIM 8.0	EC000899
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143902830
Customs tariff number	85369095000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
	Approval	Standard
	CSA	C22.2
	DEKRA Certification B.V.	70173745
Certificate Name		Certificate Name
EU-Declaration of Confor-		-
mity		-
WAGO GmbH & Co. KG		-
UK-Declaration of Confor-		-
mity		-
WAGO GmbH & Co. KG		-

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 2202-1881	↓

Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2246.92 KB	2202-1881	xml 4.42 KB
	↓	20.05.2019	↓
		2202-1881	docx 15.80 KB
		20.05.2019	↓



CAD/CAE-Data

CAD data
2D/3D Models 2202-1881



1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 2002-1891
End and intermediate plate; 1 mm thick; gray

Item No.: 2002-1892
End and intermediate plate; 1 mm thick; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



Item No.: 210-196
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored



Item No.: 210-198
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; copper-colored



Item No.: 210-508
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slopped; galvanized; similar to EN 60715; silver-colored



Item No.: 210-197
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slopped; similar to EN 60715; silver-colored



Item No.: 210-506
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; galvanized; similar to EN 60715; silver-colored



Item No.: 210-114
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored



Item No.: 210-118
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored



Item No.: 210-115
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; according to EN 60715; "Hole width 18 mm; silver-colored



Item No.: 210-112
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; according to EN 60715; "Hole width 25 mm; silver-colored



Item No.: 210-504
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; galvanized; according to EN 60715; silver-colored



Item No.: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored



Item No.: 210-505
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; galvanized; according to EN 60715; silver-colored

1.2.2 Ferrule

1.2.2.1 Ferrule



Item No.: 216-241
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



Item No.: 216-242
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-262
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-243
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-263
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-244
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-264
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-246
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



1.2.2.1 Ferrule



Item No.: 216-266
Ferrule; Sleeve for 2.5 mm² / AWG 14; in-
sulated; electro-tin plated; electrolytic
copper; gastight crimped; acc. to DIN
46228, Part 4/09.90; blue

1.2.3 Installation

1.2.3.1 Cover



Item No.: 709-156
Cover; Type 3; suitable for cover carrier,
type 3; 1 m long; transparent

1.2.3.2 Cover carrier



Item No.: 709-169
Cover carrier; Type 3; incl. fixing/retaining
screws and knurled nut; suitable for 279 to
282 and 880 Series rail-mounted terminal
blocks; suitable for 264 Series miniature
rail-mounted terminal blocks; suitable for
270 Series sensor and actuator terminal
blocks; gray

1.2.4 Insulation stop

1.2.4.1 Insulation stop



Item No.: 2002-171
Insulation stop; 0.25 - 0.5 mm²; 5 pieces/
strip; light gray



Item No.: 2002-172
Insulation stop; 0.75 - 1 mm²; 5 pieces/
strip; dark gray

1.2.5 Jumper

1.2.5.1 Jumper



Item No.: 2002-400
Continuous jumper; 2-way; insulated; light
gray



Item No.: 2002-413
Continuous jumper; 3-way; insulated;
light gray



Item No.: 2002-415
Continuous jumper; 5-way; insulated;
light gray



Item No.: 2002-423/000-006
Continuous jumper; from 1 to 3; insulated;
blue



Item No.: 2002-423
Continuous jumper; from 1 to 3; insulated;
light gray



Item No.: 2002-423/000-005
Continuous jumper; from 1 to 3; insulated;
red



Item No.: 2002-424/000-006
Continuous jumper; from 1 to 4; insulated;
blue



Item No.: 2002-424
Continuous jumper; from 1 to 4; insulated;
light gray



Item No.: 2002-424/000-005
Continuous jumper; from 1 to 4; insulated;
red



Item No.: 2002-406/020-000
Delta jumper; insulated; light gray



Item No.: 2002-410/000-006
Jumper; 10-way; insulated; blue



Item No.: 2002-410
Jumper; 10-way; insulated; light gray



1.2.5.1 Jumper

 <u>Item No.: 2002-410/000-005</u> Jumper; 10-way; insulated; red	 <u>Item No.: 2002-402/000-006</u> Jumper; 2-way; insulated; blue	 <u>Item No.: 2002-402</u> Jumper; 2-way; insulated; light gray	 <u>Item No.: 2002-402/000-005</u> Jumper; 2-way; insulated; red
 <u>Item No.: 2002-403/000-006</u> Jumper; 3-way; insulated; blue	 <u>Item No.: 2002-403</u> Jumper; 3-way; insulated; light gray	 <u>Item No.: 2002-403/000-005</u> Jumper; 3-way; insulated; red	 <u>Item No.: 2002-404/000-006</u> Jumper; 4-way; insulated; blue
 <u>Item No.: 2002-404</u> Jumper; 4-way; insulated; light gray	 <u>Item No.: 2002-404/000-005</u> Jumper; 4-way; insulated; red	 <u>Item No.: 2002-405/000-006</u> Jumper; 5-way; insulated; blue	 <u>Item No.: 2002-405</u> Jumper; 5-way; insulated; light gray
 <u>Item No.: 2002-405/000-005</u> Jumper; 5-way; insulated; red	 <u>Item No.: 2002-406/000-006</u> Jumper; 6-way; insulated; blue	 <u>Item No.: 2002-406</u> Jumper; 6-way; insulated; light gray	 <u>Item No.: 2002-406/000-005</u> Jumper; 6-way; insulated; red
 <u>Item No.: 2002-407/000-006</u> Jumper; 7-way; insulated; blue	 <u>Item No.: 2002-407</u> Jumper; 7-way; insulated; light gray	 <u>Item No.: 2002-407/000-005</u> Jumper; 7-way; insulated; red	 <u>Item No.: 2002-408/000-006</u> Jumper; 8-way; insulated; blue
 <u>Item No.: 2002-408</u> Jumper; 8-way; insulated; light gray	 <u>Item No.: 2002-408/000-005</u> Jumper; 8-way; insulated; red	 <u>Item No.: 2002-409/000-006</u> Jumper; 9-way; insulated; blue	 <u>Item No.: 2002-409</u> Jumper; 9-way; insulated; light gray
 <u>Item No.: 2002-409/000-005</u> Jumper; 9-way; insulated; red	 <u>Item No.: 2002-440</u> Jumper; from 1 to 10; insulated; light gray	 <u>Item No.: 2002-433</u> Jumper; from 1 to 3; insulated; light gray	 <u>Item No.: 2002-434</u> Jumper; from 1 to 4; insulated; light gray
 <u>Item No.: 2002-435</u> Jumper; from 1 to 5; insulated; light gray	 <u>Item No.: 2002-436</u> Jumper; from 1 to 6; insulated; light gray	 <u>Item No.: 2002-437</u> Jumper; from 1 to 7; insulated; light gray	 <u>Item No.: 2002-438</u> Jumper; from 1 to 8; insulated; light gray
 <u>Item No.: 2002-439</u> Jumper; from 1 to 9; insulated; light gray	 <u>Item No.: 2002-480</u> Staggered jumper; 10-way; insulated; light gray	 <u>Item No.: 2002-481</u> Staggered jumper; 11-way; insulated; light gray	 <u>Item No.: 2002-482</u> Staggered jumper; 12-way; insulated; light gray
 <u>Item No.: 2002-473/011-000</u> Staggered jumper; 2-way; from 1 to 3; insulated; light gray	 <u>Item No.: 2002-472</u> Staggered jumper; 2-way; insulated; light gray	 <u>Item No.: 2002-473</u> Staggered jumper; 3-way; insulated; light gray	 <u>Item No.: 2002-475/011-000</u> Staggered jumper; 3-way; insulated; light gray
 <u>Item No.: 2002-474</u> Staggered jumper; 4-way; insulated; light gray	 <u>Item No.: 2002-475</u> Staggered jumper; 5-way; insulated; light gray	 <u>Item No.: 2002-476</u> Staggered jumper; 6-way; insulated; light gray	 <u>Item No.: 2002-477</u> Staggered jumper; 7-way; insulated; light gray
 <u>Item No.: 2002-478</u> Staggered jumper; 8-way; insulated; light gray	 <u>Item No.: 2002-479</u> Staggered jumper; 9-way; insulated; light gray	 <u>Item No.: 2002-477/011-000</u> Staggered jumper; insulated; light gray	 <u>Item No.: 2002-479/011-000</u> Staggered jumper; insulated; light gray
 <u>Item No.: 2002-481/011-000</u> Staggered jumper; insulated; light gray	 <u>Item No.: 2002-405/011-000</u> Star point jumper; 3-way; insulated; light gray	 <u>Item No.: 210-103</u> Wire commoning chain; insulated; black	 <u>Item No.: 210-123</u> Wire commoning chain; insulated; blue



1.2.6 Marking

1.2.6.1 Group marker carrier



Item No.: 2009-191

Group marker carrier; gray

Item No.: 2009-192

Group marker carrier; gray

Item No.: 2009-193

Group marker carrier; gray

1.2.6.2 Marker



Item No.: 2009-145/000-006

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

Item No.: 2009-145/000-023

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-145/000-002

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

Item No.: 248-501/000-007

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

Item No.: 248-501/000-023

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

Item No.: 248-501/000-017

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

Item No.: 248-501/000-005

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

Item No.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 248-501/000-002

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

Item No.: 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 793-5501/000-014

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown

Item No.: 793-5501/000-007

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

Item No.: 793-5501/000-012

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

Item No.: 793-5501/000-005

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

Item No.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-007

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

Item No.: 2009-115/000-023

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

Item No.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-115/000-005

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



1.2.6.3 Marker carrier



Item No.: 2002-121
Adaptor; gray

Item No.: 2002-161
Adaptor; gray

Item No.: 2009-198
Adaptor; gray

1.2.6.4 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel;
not stretchable; plain; snap-on type; white

1.2.7 Push-in type wire jumper

1.2.7.1 Jumper



Item No.: 2009-414
Push-in type wire jumper; 1.5 mm²; insu-
lated; 110 mm long; black



Item No.: 2009-414/000-005
Push-in type wire jumper; 1.5 mm²; insu-
lated; 110 mm long; black



Item No.: 2009-416
Push-in type wire jumper; 1.5 mm²; insu-
lated; 250 mm long; black



Item No.: 2009-414/000-006
Push-in type wire jumper; insulated; 110
mm long; black



Item No.: 2009-412
Push-in type wire jumper; insulated; 60
mm long; black

1.2.8 Screwless end stop

1.2.8.1 Mounting accessories



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-
rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-
rail 35 x 15 and 35 x 7.5; gray

1.2.9 Test and measurement

1.2.9.1 Testing accessories



Item No.: 2002-560
Modular TOPJOB®S connector; modular;
for jumper contact slot; 10-pole; 2,50
mm²; gray



Item No.: 2002-511
Modular TOPJOB®S connector; modular;
for jumper contact slot; 1-pole; 2,50 mm²;
gray



Item No.: 2002-552
Modular TOPJOB®S connector; modular;
for jumper contact slot; 2-pole; 2,50 mm²;
gray



Item No.: 2002-553
Modular TOPJOB®S connector; modular;
for jumper contact slot; 3-pole; 2,50 mm²;
gray



Item No.: 2002-554
Modular TOPJOB®S connector; modular;
for jumper contact slot; 4-pole; 2,50 mm²;
gray



Item No.: 2002-555
Modular TOPJOB®S connector; modular;
for jumper contact slot; 5-pole; 2,50 mm²;
gray



Item No.: 2002-556
Modular TOPJOB®S connector; modular;
for jumper contact slot; 6-pole; 2,50 mm²;
gray



Item No.: 2002-557
Modular TOPJOB®S connector; modular;
for jumper contact slot; 7-pole; 2,50 mm²;
gray



Item No.: 2002-558
Modular TOPJOB®S connector; modular;
for jumper contact slot; 8-pole; 2,50 mm²;
gray



Item No.: 2002-559
Modular TOPJOB®S connector; modular;
for jumper contact slot; 9-pole; 2,50 mm²;
gray



Item No.: 2002-549
Spacer module; modular; e.g., for bridging
commoned terminal blocks; gray



Item No.: 2009-174
Test plug adapter; for 4 mm Ø test plugs;
for testing TOPJOB®S rail-mounted termi-
nal blocks; gray

1.2.9.1 Testing accessories



Item No.: 210-136
Test plug; 2 mm Ø; with 500 mm cable; red



Item No.: 2009-182
Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm; gray



Item No.: 2002-649
TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray

1.2.10 Tool

1.2.10.1 Operating tool



Item No.: 210-658
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



All conductor types at a glance



Push-in termination of solid and ferruled conductors



Push-in termination of solid and ferruled conductors




Insert fine-stranded conductors via operating tool.






Removing all conductors via operating tool.

Commoning



Insert a push-in type jumper bar and push down until it hits the backstop.



Information from the mini-automotive, blade-type fuse manufacturers		
Rating	%	F ₁
10	14	0.871
15	13	0.885
20	12	0.899
25	11	0.913
30	10	0.927
35	9	0.941
40	8	0.955
45	7	0.969
50	6	0.983
55	5	0.997
60	4	1.011
65	3	1.025
70	2	1.039
75	1	1.053
80	0	1.067
85	-1	1.081
90	-2	1.095
95	-3	1.109
100	-4	1.123
105	-5	1.137
110	-6	1.151
115	-7	1.165
120	-8	1.179
125	-9	1.193
130	-10	1.207
135	-11	1.221
140	-12	1.235
145	-13	1.249
150	-14	1.263
155	-15	1.277
160	-16	1.291
165	-17	1.305
170	-18	1.319
175	-19	1.333
180	-20	1.347
185	-21	1.361
190	-22	1.375


Application Notes on Terminal Blocks for Glass Cartridge Fuses
Diagram: "Individual Arrangement"

Application Notes on Terminal Blocks for Glass Cartridge Fuses
Diagram: "Block Arrangement"


Application Notes on Terminal Blocks for Glass Cartridge Fuses
Nominal current ratings for fuse cartridges are defined differently in international standards. This is why the recommended continuous current-carrying capacity of the fuses is a max. 80% of their nominal current according to DIN 72581/ Part 3 (for a surrounding air temperature of 23°C).
Selecting the correct fuse cartridge is important for product safety within applications, as well as for fuse cartridge service life and reliability. Fuse cartridges will only operate perfectly as protection components (break-off point) if they are properly selected and used as intended (i.e., according to the state of the technology and valid specifications, as well as data sheet characteristics), according to basic safety requirements (i.e., persons, animals and property must be protected against hazards).

Concerning product safety, fuse cartridges must generally be tested under both normal and faulty operating conditions within your application.

Marking



Snapping a marking strip into a marker slot.



Snapping a marking strip into the marker slot.