




Features

- 5 metre high output neutral white IP65 silicon sleeved LED reel supplied with 25 x 200mm clear polycarbonate mounting strips which is pre-attached with 3M adhesive tape and 10 end caps, 7020 lumens, 82W, 86lm/W, 24V, 4000K, IP65, 40,000hrs (L70), (LxWxD) 5000x14x4mm


Product Overview

Product name	LumiStrip HO IP65 5M NW
Technology	LED
Housing	Other
Environment	Internal/External
E-number FI	4271153
E-number SE	7503265
Fixture luminous flux (lm)	7020 (1404/metre)
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Total power consumption (W)	82
Electrical protection	Class III
IP rating	IP65
Product EAN number	8711971369752
Warranty	5 years

Photometry

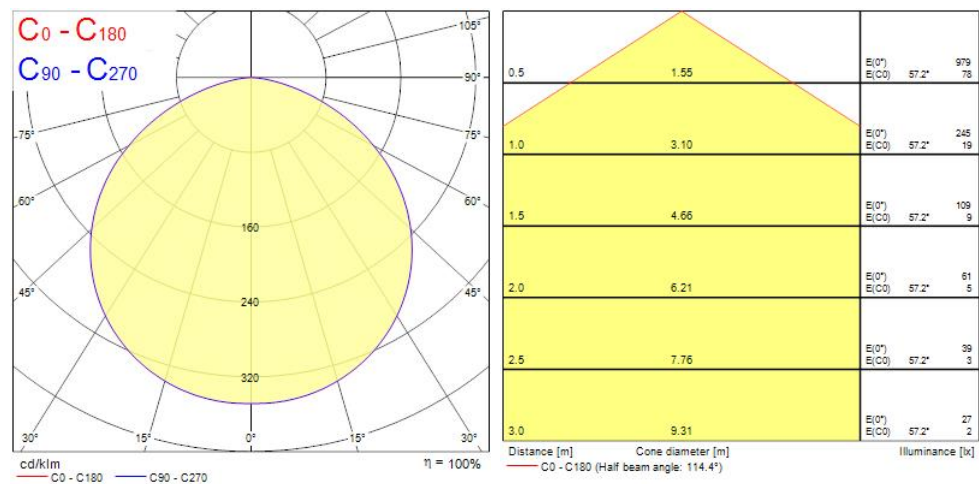

Technical drawings

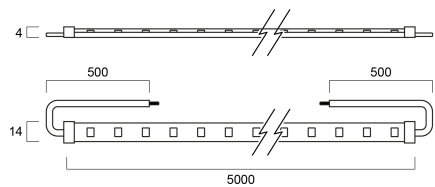

Data table

GENERAL DATA

Product name	LumiStrip HO IP65 5M NW
Technology	LED
Housing	Other
Environment	Internal/External
Operating temperature range (°C)	-25°C...+50°C
E-number FI	4271153

LumiStrip HO IP65 5M NW 3036975

E-number SE	7503265
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	7020 (1404/metre)
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N

ELECTRICAL DATA

Total power consumption (W)	82
Electrical protection	Class III
Control gear required	No
Glow Wire Test (°C)	650

PHYSICAL DATA

IP rating	IP65
Diffuser finish	Transparent
Diffuser material	Silicone
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	14
Weight (kg)	0.535

PACKAGING

Single packaging type	Carton
Product EAN number	8711971369752
Packaging single width (cm)	22.7
Packaging single depth (cm)	4.5
DUN14 (outer)	18711971369759
Packaging outer length / height (cm)	42.9

SAFETY DATA

Optimal operating condition (°C)	-25-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No