


Data Sheet | Item Number: 706-7753/304-300

System cable; for WAGO-I/O-SYSTEM, 750 Series; 2 x 8 analog inputs or outputs;
Length: 3 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-7753/304-300>

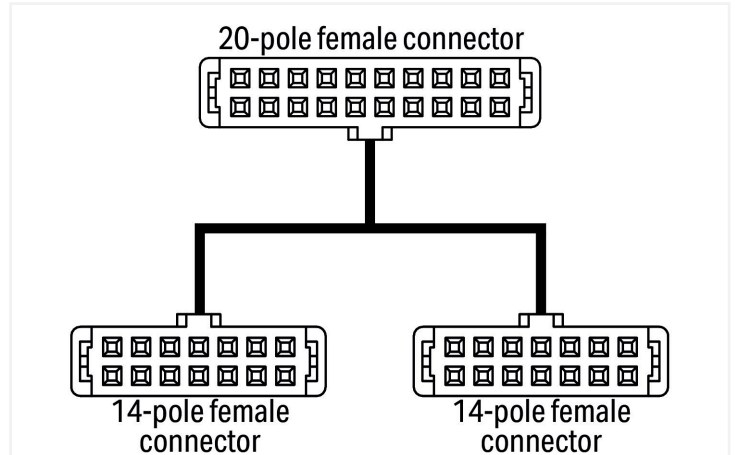

Similar to illustration

Color coding acc. to DIN VDE 47100 Cable 1: Channel 1-8	14 poles flat connector		20 poles flat connector	
	Pin number	Wiring	Pin number	Signal
White	1	CH1	1	DO1
Brown	2	CH2	2	DO2
Green	3	CH3	3	DO3
Yellow	4	CH4	4	DO4
Grey	5	CH5	5	DO5
Pink	6	CH6	6	DO6
Blue	7	CH7	7	DO7
Red	8	CH8	8	DO8
Black	9	+24V	17	+24V
Violet	10	0V	18	0V

Color coding acc. to DIN VDE 47100 Cable 2: Channel 9-16	14 poles flat connector		20 poles flat connector	
	Pin number	Wiring	Pin number	Signal
White	1	CH9	9	DO9
Brown	2	CH10	10	DO10
Green	3	CH11	11	DO11
Yellow	4	CH12	12	DO12
Grey	5	CH13	13	DO13
Pink	6	CH14	14	DO14
Blue	7	CH15	15	DO15
Red	8	CH16	16	DO16
Black	9	+24V	19	+24V
Violet	10	0V	20	0V

Short description:

WAGO's Interface Cables provide fast and easy connection of WAGO I/O Modules equipped with a 20-pole pluggable connector. The following WAGO I/O Modules and Interface Adapters are compatible:

- 750-1500 (16 DO) --> 857-981 (DO)
- 750-1502 (8 DO/8 DI) --> 857-981 (DO) and 857-982 (DI)
- The cables are available in 1-, 2- and 3-meter lengths; each has one 20-pole or two 14-pole pluggable connectors at both ends.
- They are suitable for system wiring when paired with 857-981 and 857-982 Interface Adapters.

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data

Inputs/outputs	2 x 8 analog inputs or outputs
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	20
Connection type	System
Wire cross-section	0.14 mm ²

Connection 2

Connector	Pluggable connector per DIN 41651; female connector
Pole number	14
Connection type	System
Wire cross-section	0.14 mm ²

Connection 3

Connector	Pluggable connector per DIN 41651; female connector
Pole number	14
Connection type	System
Wire cross-section	0.14 mm ²

Physical data

Cable length	3 m
--------------	-----

Material data

Fire load	0 MJ
Weight	261 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

Product Group	30 (WAGO France)
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821081630
Customs tariff number	85444290900

Product Classification

UNSPSC	26121604
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 706-7753/304-300	↓

Documentation

Bid Text			
706-7753/304-300	26.11.2018	docx 15.27 KB	↓
706-7753/304-300	19.02.2019	xml 3.70 KB	↓

CAD/CAE-Data

CAE data	
WSCAD Universe 706-7753/304-300	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Interface module

1.1.1.1 Interface adapters



Item No.: 857-981
Interface adapter; 14-pole; High-side switching input

Item No.: 857-982
Interface adapter; 14-pole; High-side switching output

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com