



Data Sheet | Item Number: 706-100/615-400
Connection cable; 15-pole; with solder pin; Female connector; open-ended; Length: 4 m;
Conductor cross-section: 0.25 mm²
<https://www.wago.com/706-100/615-400>

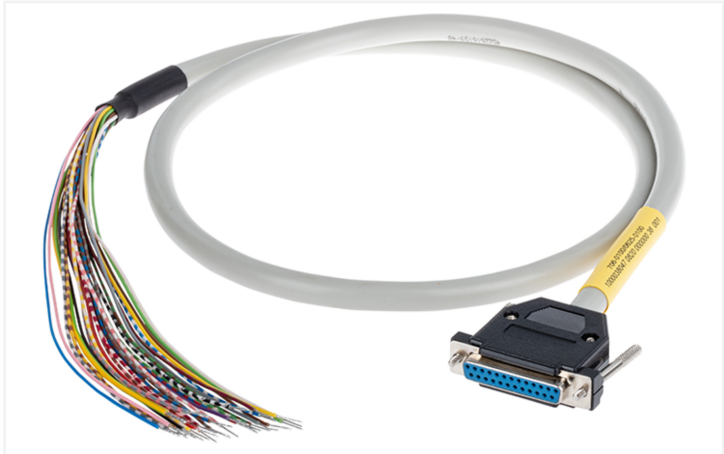

Similar to illustration

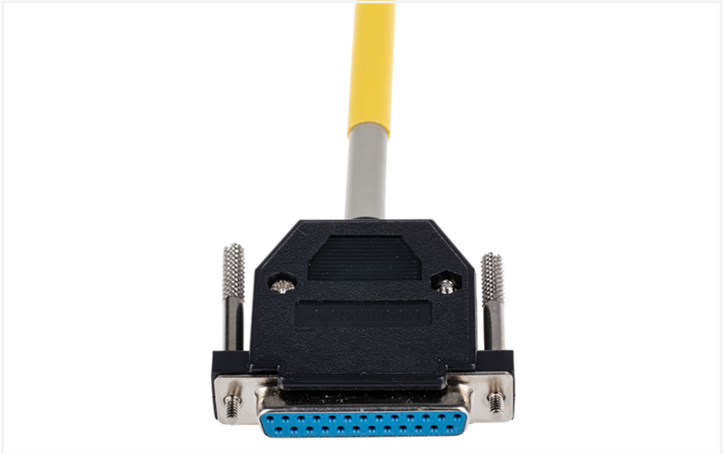

Similar to illustration

Color coding acc. to DIN VDE 47100		15 poles female Sub-D connector	
		Pin number	
White			1
Brown			2
Green			3
Yellow			4
Grey			5
Pink			6
Blue			7
Red			8
Black			9
Violet			10
Grey-Pink			11
Red-Blue			12
White-Green			13
Brown-Green			14
White-Yellow			15
Shield		Connected to Sub-D	

Notes	
Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data	
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Connection Data			
Cable type	LIYCY	Connection 1	
Color code	per DIN VDE 47100		
		Pluggable connector	D-subminiature female connector
		Pole number 1	15
		Connection type	System
		Wire cross-section	0.25 mm²



Connection 2	
Connector	open-ended
Connection type	open-ended
Wire cross-section	0.25 mm²

Physical data	
Cable length	4 m

Material data	
Weight	552 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4066966362466
Customs tariff number	85444290900

Product Classification	
UNSPSC	26121604
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
706-100/615-400

↓