


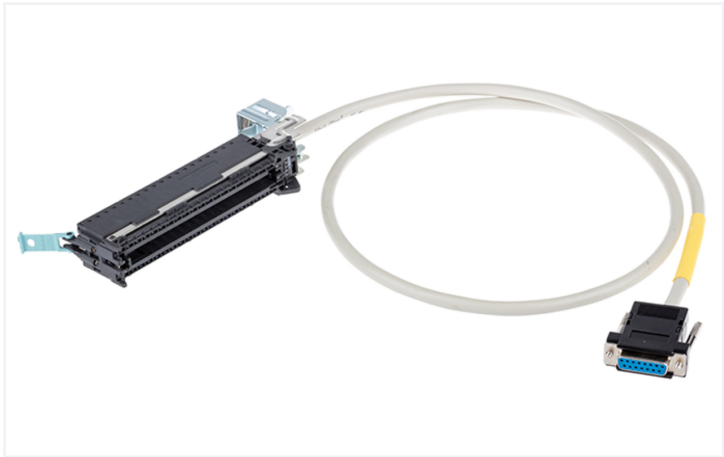

Color coding acc. to DIN VDE 47100		15 poles Sub-D connector		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	0+	1	Q0
Brown		2	0-	4	Mana
Green		3	1+	2	S0+
Yellow		4	1-	3	S0-
Grey		5	2+	5	Q1
Pink		6	2-	8	Mana
Blue		7	3+	6	S1+
Red		8	3-	7	S1-
Black		9	+	41	L+
Violet		10	-	43	M
Shield		Connected to Sub-D			

Similar to illustration

Notes		
Note		When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data		
Inputs/outputs		4 analog outputs; voltage
Operating voltage		≤ 35 VAC/VDC
Current per wire (max.)		2 A

Compatibility		
Siemens		
Siemens S7-1500	6ES7 532-5HD00-0AB0	
	6ES7 532-5ND00-0AB0	

Connection data			
Cable type	LiYCY	Connection 1	
Color code	per DIN VDE 47100	Pluggable connector	D-subminiature female connector
		Pole number 1	15
		Connection type	System
		Wire cross-section	0.25 mm²

Connection 2	
Connector	Siemens 6ES7-592-1BM00-0XB0
Pole number	40
Connection type	System
Wire cross-section	0.25 mm²



Physical data		
Cable length		1 m

Material data		
Fire load		0 MJ
Weight		237 g

Environmental requirements		
Ambient temperature (operation)		-20 ... +50 °C

Commercial data		
PU (SPU)		1 pcs
Packaging type		Bag
Country of origin		FR
GTIN		4066966697803
Customs tariff number		85444290900

Product Classification		
UNSPSC		26121629
ETIM 9.0		EC000237
ETIM 10.0		EC000237
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance 706-2500/504-100		

Documentation		
System Description		
WAGO System Wiring, Selection Guide	pdf 533.15 KB	