


Features

- Integrated LED recessed spotlight, RAL9016 colour, 630lm, 7.0W, phase dimmable, 2700K/3000K/4000K, 110° degree beam angle, ABS plastic white body, low profile 47mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 68-74mm cutout, clear lens. Can be covered with insulation. Fixture can be covered with insulation. Additional silver bezel included in the packaging.

Product Overview

Product name	SYLSPOT LV 630LM 3-CCT DIM IP65 WHT
Technology	LED
Cap/Base	N/A
Housing	ABS Plastic
Mount	Ceiling recessed mounting
Fixture luminous flux (lm)	630
Luminaire efficacy (lm/W)	90
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Total power consumption (W)	7
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288052571
Warranty	3 years

Photometry

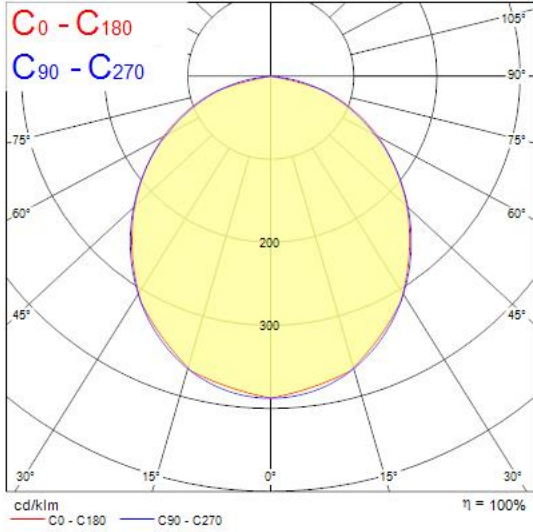

Technical drawings

