


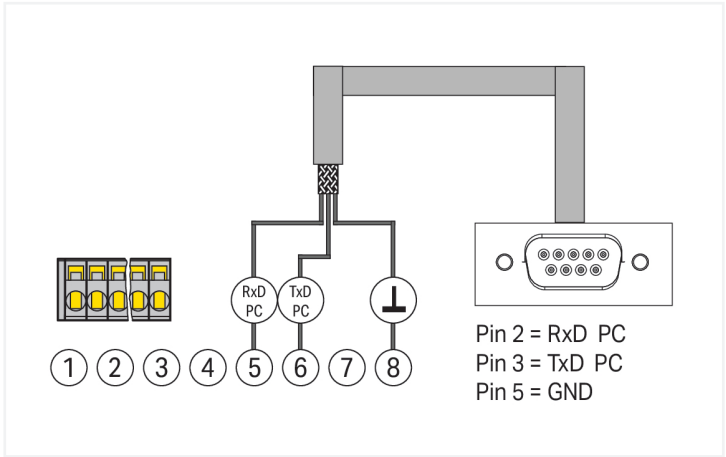

Short description:
WAGO's communication cable is used for configuration and visualization via PC or controller.
It is suitable for all 787-8xx devices equipped with an RS-232 serial interface.
Download the corresponding PC software for all 787 Series devices at www.wago.com
Function blocks for communication with the WAGO I/O System 750 and other control systems are also available.

Notes	
Note	The communication cable is not electrically isolated.

Technical data	
Signaling and communication	
Signaling	1 x RS-232 cable
Communications	RS-232 serial interface

Safety and protection	
Protection type	IP20; per EN 60529

Connection data	
Cable type	3 x 0.34 mm²; shielded
Connection 1	
Connection type 1	Module side (787-8xx)
Connection technology	1 x 8-pole female connector (733-108) with strain relief

Connection 2	
Connection type	PC/controller side
Connection technology	1 x 9 pole D-sub socket



Physical data		
Cable length		1.8 m

Material data		
Fire load		0 MJ
Weight		113 g

Environmental requirements		
Ambient temperature (operation)		-10 ... +70 °C

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
eCl@ss 10.0		27-06-18-90
eCl@ss 9.0		27-06-03-11
ETIM 9.0		EC001408
ETIM 8.0		EC001408
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454909741
Customs tariff number		85444290900

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance 787-890		

Documentation				
Bid Text				
787-890	06.12.2019	xml	3.75 KB	
787-890	20.01.2015	doc	25.00 KB	
787-890	20.01.2015	docx	15.52 KB	
787-890	20.01.2015	pdf	67.29 KB	



CAD/CAE-Data	
CAE data	
WSCAD Universe 787-890	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Cables and connectors
1.1.1.1 Connecting cable



Item No.: [761-9005](#)
USB adapter; with 1m connection cable