
# Technical data sheet

## Trunking unit for GESR9, height 60–110 mm

## Item number: 7424784

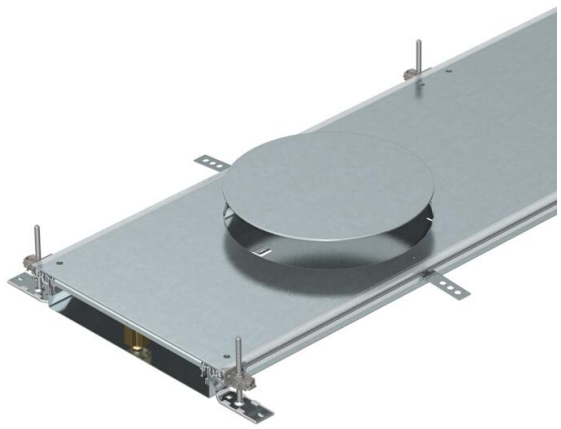

Ready-to-mount trunking unit with three or six device installation lids for cable laying and the installation of flush-mount units of nominal size R9, consisting of the trunking base (floor trough with side and floor covering contact profiles) and trunking lid with blank covered mounting opening. Floor trough with holding straps for self-contacting mounting of separating retainers. The scope of delivery contains 6 height-adjustable fixing brackets, 6 screed anchors and height-adjustable lid butt supports: 3x for nominal trunking width 400 and 6x for nominal trunking widths 500 and 600. Trunking lid screwed down when delivered.

With three (for nominal trunking width 400, L = 800 mm) or six device installation covers (for nominal trunking widths 500 and 600, L = 400 mm), each with one installation opening for a round installation unit of nominal size 9 or 9/55.


St Steel

FS Strip galvanised

### Master data

| | |
|---|---|
| Item number | 7424784 |
| Type | OKA-W6006050DR9 |
| Description 1 | Flushfloor trunking unit |
| Description 2 | for service unit GESR9 |
| Manufacturer | OBO |
| Dimension | 2400x600x60 |
| Material | Steel |
| Surface | Strip galvanised |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 2.4 |
| Unit of quantity | Metre |
| Weight | 2537.5 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 108,9032 kg CO2e / 1 Meter |

### Dimensions




| | |
|---|---|
| Length | 2,400 mm |
| Width | 600 mm |

# Technical data sheet

## Trunking unit for GESR9, height 60–110 mm

## Item number: 7424784

### Technical data

| | |
|---|---|
| Mounting opening cover | yes |
| Covers | 6 |
| Number of insertable partitions | 2 |
| Number of planned flush-mount units | 6 |
| Number of compartments | 3 St. |
| Mounting system fastening type | Floor |
| Floor plate | yes |
| Cover fastening, locking | no |
| Seal installation option | yes |
| Installation opening for on-floor tank | no |
| Decouplable | no |
| Suitable for expansion joint | no |
| Mesh wall | no |
| Trunking height, max. | 110 mm |
| Duct height, min. | 60 mm |
| Cover material thickness | 4 |
| Minimum screed height | 60 |
| With connection opening | yes |
| With equipotential bonding | no |
| With separating retainer | no |
| With overhang | yes |
| Mounting opening | For service outlet |
| Mounting opening | Round |
| Height-adjustment range, max. | 110 mm |
| Height-adjustment range, min. | 60 mm |
| Removable cover | yes |
| ROHS-conformant | yes |