


## Walraven VibraTek® HS-1X Spring Hanger

(L20542)

high performance spring isolator for medium to heavy machinery

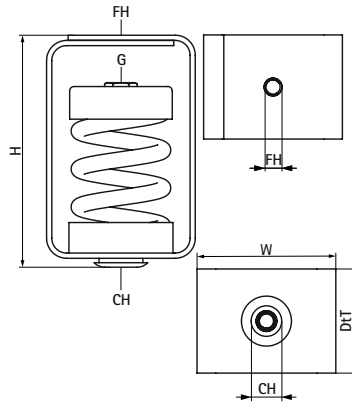

### Features & benefits

- simple to install and does not need to be fixed to the base material
- recommended for machinery with low working speeds above 700 rpm
- epoxy powder-coated housing, cap and spring provide increased resistance to corrosion
- rubber spring base cup prevents contact between housing and the spring
- working temperature range -90 °C till 150 °C

Product Number	Connection Thread	Total Width x Total Height x Total Depth	Fixing Hole	Connection Hole	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
<i>Reference letter</i>	G	W x H x DtT	FH	CH			25
<i>Unit description</i>		mm x mm x mm	mm	mm	N	N	mm
2800701000	M12	75 x 150 x 100	13	22	100	920	25
2800701250	M12	75 x 150 x 100	13	22	130	1,150	25
2800701500	M12	75 x 150 x 100	13	22	150	1,380	25
2800702000	M12	75 x 150 x 100	13	22	200	1,840	25
2800703000	M12	75 x 150 x 100	13	22	300	2,760	25
2800704000	M12	75 x 150 x 100	13	22	400	3,680	25
2800705000	M12	75 x 150 x 100	13	22	500	4,600	25
2800706000	M12	75 x 150 x 100	13	22	600	5,520	25