




**Data Sheet | Item Number: 2202-1681**

2-conductor fuse terminal block; for mini-automotive blade-style fuses; per DIN 7258-3f, ISO 8820-3; with test option; with push-button; without blown fuse indication; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

<https://www.wago.com/2202-1681>

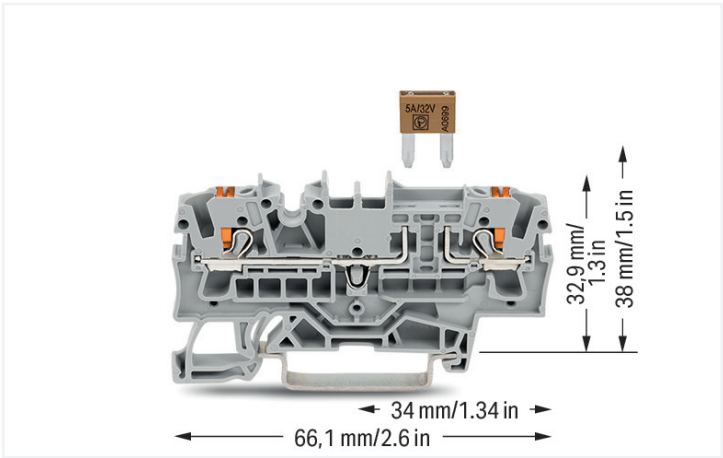

Color: ■ gray

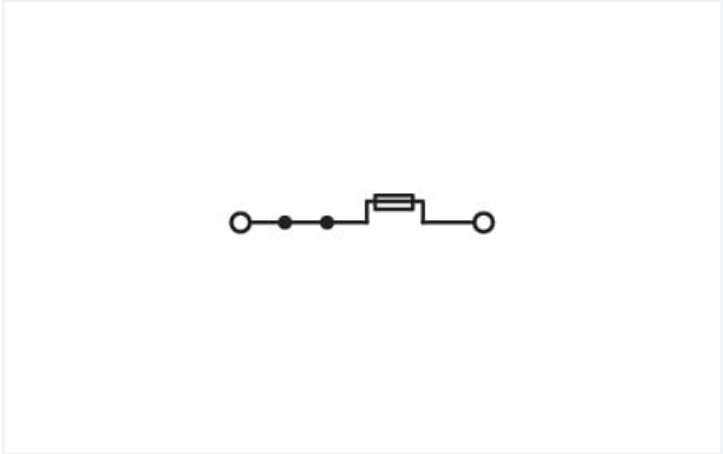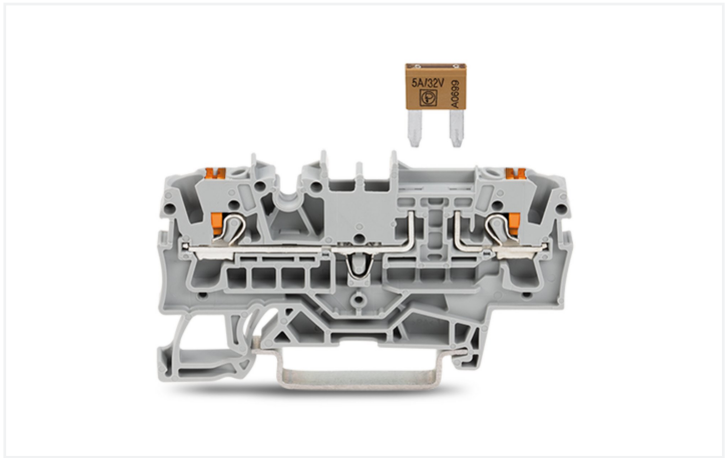

Similar to illustration

Fuse terminal block, 2202 Series, push-button

Connect conductors quickly and securely with this fuse terminal block (item number 2202-1681). Ensure that the strip lengths are between 10 mm and 12 mm when connecting conductors to this fuse terminal block. Featuring conductor terminals along with Push-in CAGE CLAMP®, this connector delivers reliable performance. Push-in CAGE CLAMP® technology provides a universal connection solution for any type of conductor. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. Depending on the type of conductor, this fuse terminal block is designed for conductor cross sections ranging from 0.25 mm² to 4 mm². It has one level. Two potentials can connect using the two clamping points The gray housing is made of polyamide (PA66) for insulation. These function terminal blocks are mounted using DIN-35 rails..

Electrical data				
Ratings per		IEC/EN 60947-7-3		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		400 V	-	-
Rated surge voltage		6 kV	-	-
Rated current		10 A	-	-
Ratings per IEC/EN – Notes				
Ratings (note)		Electrical ratings are given by the fuse.		



Ratings per IEC/EN 2	
Ratings (note)	Blade-style fuses: Observe touch-proof protection for 42 V and higher voltages! <ul style="list-style-type: none"><li>• 10 A (individual arrangement)</li><li>• 5 A (block arrangement)</li></ul>

Approvals per		UL 1059		
Use group	B	C	D	
Rated voltage	300 V	300 V	-	
Rated current	10 A	10 A	-	

Approvals per		CSA 22.2 No 158		
Use group	B	C	D	
Rated voltage	300 V	300 V	-	
Rated current	10 A	10 A	-	

General information	
Fuse receptacle	pluggable
Fuse type	Mini flat plug-in fuse; 10.9 x 3.6 x 16.3 mm

Connection data	
Clamping units	2
Total number of potentials	2
Number of levels	1
Number of jumper slots	2

Connection 1	
Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-button
Connectable conductor materials	Copper
Nominal cross-section	2.5 mm²
Solid conductor	0.25 ... 4 mm² / 22 ... 12 AWG
Solid conductor; push-in termination	0.75 ... 4 mm² / 18 ... 12 AWG
Fine-stranded conductor	0.25 ... 4 mm² / 22 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm² / 22 ... 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1 ... 2.5 mm² / 18 ... 14 AWG
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches
Wiring direction	Front-entry wiring

Physical data	
Width	5.2 mm / 0.205 inches
Height	66.1 mm / 2.602 inches
Depth from upper-edge of DIN-rail	32.9 mm / 1.295 inches

Mechanical data	
Mounting type	DIN-35 rail
Marking level	Center/side marking


Material data	
Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.016 MJ
Actuator color	orange
Weight	7.2 g







Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data	
ETIM 9.0	EC000899
ETIM 8.0	EC000899
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143907651
Customs tariff number	85369095000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates			
General approvals		Declarations of conformity and manufacturer's declarations	
			
Approval	Standard	Certificate Name	
CSA DEKRA Certification B.V.	C22.2	70173745	
UL Underwriters Laboratories Inc.	UL 1059	UL-CA- L45172-6189178-11508102-1	
Approval	Standard	Certificate Name	
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 2202-1681	

Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2246.92 KB		
2202-1681	20.05.2019	xml 4.42 KB	
2202-1681	20.05.2019	docx 15.82 KB	



CAD/CAE-Data

CAD data

2D/3D Models  
2202-1681

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



**Item No.: 2002-1691**  
End and intermediate plate; 1 mm thick; gray



**Item No.: 2002-1692**  
End and intermediate plate; 1 mm thick; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



**Item No.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored



**Item No.: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; copper-colored



**Item No.: 210-508**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slopped; galvanized; similar to EN 60715; silver-colored



**Item No.: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slopped; similar to EN 60715; silver-colored



**Item No.: 210-506**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; galvanized; similar to EN 60715; silver-colored



**Item No.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored



**Item No.: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored



**Item No.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; according to EN 60715; "Hole width 18 mm; silver-colored



**Item No.: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; according to EN 60715; "Hole width 25 mm; silver-colored



**Item No.: 210-504**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slopped; galvanized; according to EN 60715; silver-colored



**Item No.: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored



**Item No.: 210-505**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; galvanized; according to EN 60715; silver-colored

1.2.2 Ferrule

1.2.2.1 Ferrule



**Item No.: 216-241**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



**Item No.: 216-242**  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-262**  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-243**  
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-263**  
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-244**  
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-264**  
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-246**  
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



1.2.2.1 Ferrule



**Item No.: 216-266**  
Ferrule; Sleeve for 2.5 mm² / AWG 14; in-  
sulated; electro-tin plated; electrolytic  
copper; gastight crimped; acc. to DIN  
46228, Part 4/09.90; blue

1.2.3 Installation

1.2.3.1 Cover



**Item No.: 709-156**  
Cover; Type 3; suitable for cover carrier,  
type 3; 1 m long; transparent

1.2.3.2 Cover carrier



**Item No.: 709-169**  
Cover carrier; Type 3; incl. fixing/retaining  
screws and knurled nut; suitable for 279 to  
282 and 880 Series rail-mounted terminal  
blocks; suitable for 264 Series miniature  
rail-mounted terminal blocks; suitable for  
270 Series sensor and actuator terminal  
blocks; gray

1.2.4 Insulation stop

1.2.4.1 Insulation stop



**Item No.: 2002-171**  
Insulation stop; 0.25 - 0.5 mm²; 5 pieces/  
strip; light gray



**Item No.: 2002-172**  
Insulation stop; 0.75 - 1 mm²; 5 pieces/  
strip; dark gray

1.2.5 Jumper

1.2.5.1 Jumper



**Item No.: 2002-400**  
Continuous jumper; 2-way; insulated; light  
gray



**Item No.: 2002-413**  
Continuous jumper; 3-way; insulated;  
light gray



**Item No.: 2002-415**  
Continuous jumper; 5-way; insulated;  
light gray



**Item No.: 2002-423/000-006**  
Continuous jumper; from 1 to 3; insulated;  
blue



**Item No.: 2002-423**  
Continuous jumper; from 1 to 3; insulated;  
light gray



**Item No.: 2002-423/000-005**  
Continuous jumper; from 1 to 3; insulated;  
red



**Item No.: 2002-424/000-006**  
Continuous jumper; from 1 to 4; insulated;  
blue



**Item No.: 2002-424**  
Continuous jumper; from 1 to 4; insulated;  
light gray



**Item No.: 2002-424/000-005**  
Continuous jumper; from 1 to 4; insulated;  
red



**Item No.: 2002-406/020-000**  
Delta jumper; insulated; light gray



**Item No.: 2002-410/000-006**  
Jumper; 10-way; insulated; blue



**Item No.: 2002-410**  
Jumper; 10-way; insulated; light gray



1.2.5.1 Jumper

 <u>Item No.: 2002-410/000-005</u> Jumper; 10-way; insulated; red	 <u>Item No.: 2002-402/000-006</u> Jumper; 2-way; insulated; blue	 <u>Item No.: 2002-402</u> Jumper; 2-way; insulated; light gray	 <u>Item No.: 2002-402/000-005</u> Jumper; 2-way; insulated; red
 <u>Item No.: 2002-403/000-006</u> Jumper; 3-way; insulated; blue	 <u>Item No.: 2002-403</u> Jumper; 3-way; insulated; light gray	 <u>Item No.: 2002-403/000-005</u> Jumper; 3-way; insulated; red	 <u>Item No.: 2002-404/000-006</u> Jumper; 4-way; insulated; blue
 <u>Item No.: 2002-404</u> Jumper; 4-way; insulated; light gray	 <u>Item No.: 2002-404/000-005</u> Jumper; 4-way; insulated; red	 <u>Item No.: 2002-405/000-006</u> Jumper; 5-way; insulated; blue	 <u>Item No.: 2002-405</u> Jumper; 5-way; insulated; light gray
 <u>Item No.: 2002-405/000-005</u> Jumper; 5-way; insulated; red	 <u>Item No.: 2002-406/000-006</u> Jumper; 6-way; insulated; blue	 <u>Item No.: 2002-406</u> Jumper; 6-way; insulated; light gray	 <u>Item No.: 2002-406/000-005</u> Jumper; 6-way; insulated; red
 <u>Item No.: 2002-407/000-006</u> Jumper; 7-way; insulated; blue	 <u>Item No.: 2002-407</u> Jumper; 7-way; insulated; light gray	 <u>Item No.: 2002-407/000-005</u> Jumper; 7-way; insulated; red	 <u>Item No.: 2002-408/000-006</u> Jumper; 8-way; insulated; blue
 <u>Item No.: 2002-408</u> Jumper; 8-way; insulated; light gray	 <u>Item No.: 2002-408/000-005</u> Jumper; 8-way; insulated; red	 <u>Item No.: 2002-409/000-006</u> Jumper; 9-way; insulated; blue	 <u>Item No.: 2002-409</u> Jumper; 9-way; insulated; light gray
 <u>Item No.: 2002-409/000-005</u> Jumper; 9-way; insulated; red	 <u>Item No.: 2002-440</u> Jumper; from 1 to 10; insulated; light gray	 <u>Item No.: 2002-433</u> Jumper; from 1 to 3; insulated; light gray	 <u>Item No.: 2002-434</u> Jumper; from 1 to 4; insulated; light gray
 <u>Item No.: 2002-435</u> Jumper; from 1 to 5; insulated; light gray	 <u>Item No.: 2002-436</u> Jumper; from 1 to 6; insulated; light gray	 <u>Item No.: 2002-437</u> Jumper; from 1 to 7; insulated; light gray	 <u>Item No.: 2002-438</u> Jumper; from 1 to 8; insulated; light gray
 <u>Item No.: 2002-439</u> Jumper; from 1 to 9; insulated; light gray	 <u>Item No.: 2002-480</u> Staggered jumper; 10-way; insulated; light gray	 <u>Item No.: 2002-481</u> Staggered jumper; 11-way; insulated; light gray	 <u>Item No.: 2002-482</u> Staggered jumper; 12-way; insulated; light gray
 <u>Item No.: 2002-473/011-000</u> Staggered jumper; 2-way; from 1 to 3; insulated; light gray	 <u>Item No.: 2002-472</u> Staggered jumper; 2-way; insulated; light gray	 <u>Item No.: 2002-473</u> Staggered jumper; 3-way; insulated; light gray	 <u>Item No.: 2002-475/011-000</u> Staggered jumper; 3-way; insulated; light gray
 <u>Item No.: 2002-474</u> Staggered jumper; 4-way; insulated; light gray	 <u>Item No.: 2002-475</u> Staggered jumper; 5-way; insulated; light gray	 <u>Item No.: 2002-476</u> Staggered jumper; 6-way; insulated; light gray	 <u>Item No.: 2002-477</u> Staggered jumper; 7-way; insulated; light gray
 <u>Item No.: 2002-478</u> Staggered jumper; 8-way; insulated; light gray	 <u>Item No.: 2002-479</u> Staggered jumper; 9-way; insulated; light gray	 <u>Item No.: 2002-477/011-000</u> Staggered jumper; insulated; light gray	 <u>Item No.: 2002-479/011-000</u> Staggered jumper; insulated; light gray
 <u>Item No.: 2002-481/011-000</u> Staggered jumper; insulated; light gray	 <u>Item No.: 2002-405/011-000</u> Star point jumper; 3-way; insulated; light gray	 <u>Item No.: 210-103</u> Wire commoning chain; insulated; black	 <u>Item No.: 210-123</u> Wire commoning chain; insulated; blue



1.2.6 Marking

1.2.6.1 Group marker carrier



Item No.: 2009-191

Group marker carrier; gray

Item No.: 2009-192

Group marker carrier; gray

Item No.: 2009-193

Group marker carrier; gray

1.2.6.2 Marker



Item No.: 2009-145/000-006

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

Item No.: 2009-145/000-023

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-145/000-002

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

Item No.: 248-501/000-007

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

Item No.: 248-501/000-023

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

Item No.: 248-501/000-017

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

Item No.: 248-501/000-005

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

Item No.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 248-501/000-002

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

Item No.: 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 793-5501/000-014

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown

Item No.: 793-5501/000-007

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

Item No.: 793-5501/000-012

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

Item No.: 793-5501/000-005

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

Item No.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-007

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

Item No.: 2009-115/000-023

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Item No.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

Item No.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-115/000-005

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

Item No.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



1.2.6.3 Marker carrier



Item No.: 2002-121  
Adaptor; gray

Item No.: 2002-161  
Adaptor; gray

Item No.: 2009-198  
Adaptor; gray

1.2.6.4 Marking strip



Item No.: 2009-110  
Marking strips; for Smart Printer; on reel;  
not stretchable; plain; snap-on type; white

1.2.7 Push-in type wire jumper

1.2.7.1 Jumper



Item No.: 2009-414  
Push-in type wire jumper; 1.5 mm<sup>2</sup>; insu-  
lated; 110 mm long; black



Item No.: 2009-414/000-005  
Push-in type wire jumper; 1.5 mm<sup>2</sup>; insu-  
lated; 110 mm long; black



Item No.: 2009-416  
Push-in type wire jumper; 1.5 mm<sup>2</sup>; insu-  
lated; 250 mm long; black



Item No.: 2009-414/000-006  
Push-in type wire jumper; insulated; 110  
mm long; black



Item No.: 2009-412  
Push-in type wire jumper; insulated; 60  
mm long; black

1.2.8 Screwless end stop

1.2.8.1 Mounting accessories



Item No.: 249-117  
Screwless end stop; 10 mm wide; for DIN-  
rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116  
Screwless end stop; 6 mm wide; for DIN-  
rail 35 x 15 and 35 x 7.5; gray

1.2.9 Test and measurement

1.2.9.1 Testing accessories



Item No.: 2002-560  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 10-pole; 2,50  
mm<sup>2</sup>; gray



Item No.: 2002-511  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 1-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-552  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 2-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-553  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 3-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-554  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 4-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-555  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 5-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-556  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 6-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-557  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 7-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-558  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 8-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-559  
Modular TOPJOB®S connector; modular;  
for jumper contact slot; 9-pole; 2,50 mm<sup>2</sup>;  
gray



Item No.: 2002-549  
Spacer module; modular; e.g., for bridging  
commoned terminal blocks; gray



Item No.: 2009-174  
Test plug adapter; for 4 mm Ø test plugs;  
for testing TOPJOB®S rail-mounted termi-  
nal blocks; gray



1.2.9.1 Testing accessories



**Item No.: 210-136**  
Test plug; 2 mm Ø; with 500 mm cable; red



**Item No.: 2009-182**  
Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm; gray



**Item No.: 2002-649**  
TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray

1.2.10 Tool

1.2.10.1 Operating tool




**Item No.: 210-658**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured



**Item No.: 210-720**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



**All conductor types at a glance**



Push-in termination of solid and ferruled conductors



Push-in termination of solid and ferruled conductors




Insert fine-stranded conductors via operating tool.






Removing all conductors via operating tool.

Commoning



Insert a push-in type jumper bar and push down until it hits the backstop.



Information from the mini-automotive, blade-type fuse manufacturers		
Rating	%	F <sub>1</sub>
-25	14	0.871
-15	13	0.885
-5	12	0.899
5	11	0.913
15	10	0.927
25	9	0.941
35	8	0.955
45	7	0.969
55	6	0.983
65	5	0.997
75	4	1.011
85	3	1.025
95	2	1.039
105	1	1.053
115	0	1.067
125	-1	1.081
135	-2	1.095
145	-3	1.109
155	-4	1.123
165	-5	1.137
175	-6	1.151
185	-7	1.165
195	-8	1.179
205	-9	1.193
215	-10	1.207
225	-11	1.221


**Application Notes on Terminal Blocks for Glass Cartridge Fuses**  
Diagram: "Individual Arrangement"

**Application Notes on Terminal Blocks for Glass Cartridge Fuses**  
Diagram: "Block Arrangement"

**Application Notes on Terminal Blocks for Glass Cartridge Fuses**  
Nominal current ratings for fuse cartridges are defined differently in international standards. This is why the recommended continuous current-carrying capacity of the fuses is a max. 80% of their nominal current according to DIN 72581/ Part 3 (for a surrounding air temperature of 23°C).  
Selecting the correct fuse cartridge is important for product safety within applications, as well as for fuse cartridge service life and reliability. Fuse cartridges will only operate perfectly as protection components (break-off point) if they are properly selected and used as intended (i.e., according to the state of the technology and valid specifications, as well as data sheet characteristics), according to basic safety requirements (i.e., persons, animals and property must be protected against hazards).

Concerning product safety, fuse cartridges must generally be tested under both normal and faulty operating conditions within your application.

**Marking**



Snapping a marking strip into a marker slot.

Snapping a marking strip into the marker slot.