




Data Sheet | Item Number: 788-936

Basic relay; Nominal input voltage: 24 VDC; 2 changeover contacts; Limiting continuous current: 8 A; with manual operation; Module width: 13 mm


<https://www.wago.com/788-936>

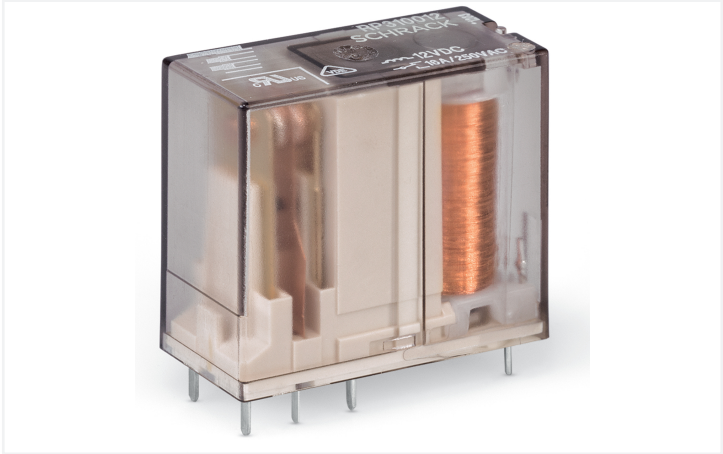

Similar to illustration

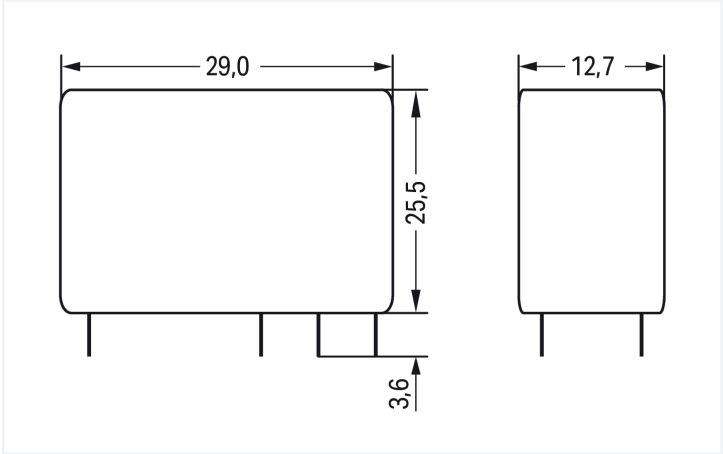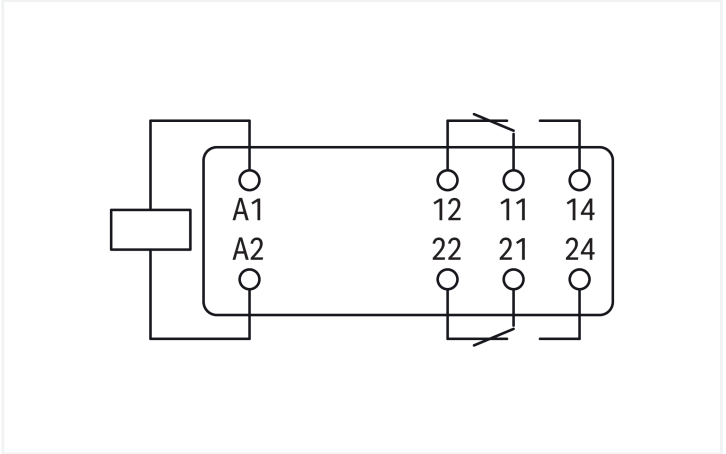

Dimensions in mm

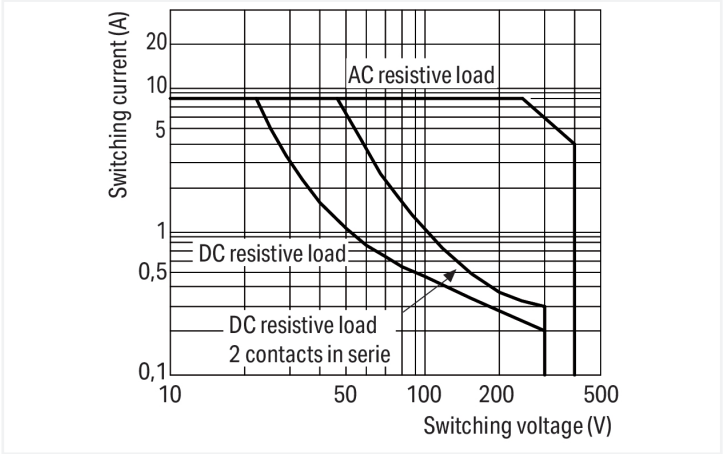

Load limit curve

Technical data			
Control circuit		Load circuit	
Nominal input voltage U_N	24 VDC	Number of changeover/switchover contacts	2
Nominal input current at U_N	16.7 mA	Contact material (relay)	AgNi
		Limiting continuous current	8 A
		Inrush current (resistive) max.	(AC) 12 A
		Switching Voltage, Max.	250 VAC
		Switching power (resistive) max.	AC 2000 VA; DC (see load limit curve)
		Switching capacity	AC-15: 1.5 A / 240 VAC; DC-13: 1 A / 24 VDC
		Recommended minimum load	12 V / 10 mA
		Pull-in time (typ.)	15 ms
		Drop-out time (typ.)	8 ms
		Bounce time (typ.)	7 ms
		Electrical life (NO; resistive load; 23 °C)	10 x 10 ⁹ switching operations
		Mechanical life	5 x 10 ⁶ switching operations
		Switching frequency with/without load (max.)	6 min ⁻¹ / 300 min ⁻¹



Signaling	
Status indicator	Mechanical

Safety and protection	
Dielectric strength (control/load circuit) (AC, 1 min)	5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Dielectric strength (load/load circuit) (AC, 1 min)	2.5 kVrms

Physical data	
Width	12.7 mm / 0.5 inches
Height from the surface	25.5 mm / 1.004 inches
Depth	29 mm / 1.142 inches

Mechanical data	
Mounting type	Pluggable module

Material data	
Note (material data)	Information on material specifications can be found here
Fire load	0 MJ
Weight	15.3 g

Environmental requirements	
Ambient temperature (operation at U _N)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C

Standards and specifications	
Standards/specifications	EN 61810-1

Commercial data	
ETIM 9.0	EC001437
ETIM 8.0	EC001437
PU (SPU)	8 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143693387
Customs tariff number	85364900990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 788-936	