


Technical data sheet

Lightning ISO clip

Item number: 2157241



Lightning ISO clips: plastic clip with metal insert, therefore also suitable for heavy-duty applications; metal parts made of electrogalvanised steel.

3015 with 4.5 mm slot.

*Sizes 6–12 and 10–17 not suitable for bolt-firing device.



PS Polystyrene

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 2157241 |
| Type | 3015 24 LGR |
| Description 1 | Lightning ISO clip |
| Description 2 | with slot |
| Manufacturer | OBO |
| Dimension | 17-24mm |
| Colour | Light grey; RAL 7035 |
| Material | Polystyrene |
| Smallest sales unit | 50 |
| Unit of quantity | Units |
| Weight | 2,542 kg |
| Weight unit | kg/100 pairs |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0688 kg CO2e / 1 Piece |


Technical data sheet

Lightning ISO clip

Item number: 2157241



Dimensions

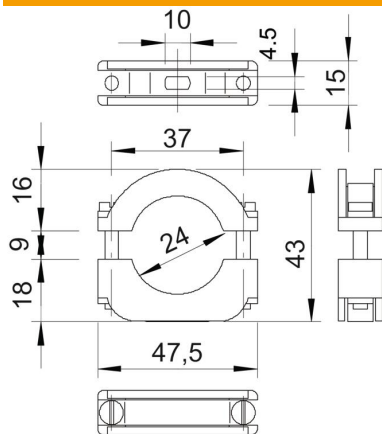

| | |
|-------------------|---------|
| Dimension A | 47,5 mm |
| Dimension B | 37 mm |
| Dimension b | 15 mm |
| Dimension D | 24 mm |
| Dimension H | 43 mm |
| Dimension Ho (mm) | 16 |
| Dimension Hu (mm) | 18 |
| Dimension L | 10 mm |

Technical specifications

| | |
|----------------------------------|------------|
| Number of cables/pipes | 1 |
| Version for | Closed |
| Fastening type | Screw hole |
| Suitable in fire protection area | no |
| Halogen-free | yes |
| Plastic-covered | no |
| Bolt | M4 x 30 |
| Clamping range D, max. | 24 mm |
| Clamping range D, min. | 17 mm |
| UV-resistant | no |