

# Concord

OFFICELYTE 600 4000K C90 HO EM  
2069535



## Features

- Concord OFFICELYTE 600 4000K C90 HO EM is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. 595x595x92mm dimensions. 4200lm luminous flux, 36.5W total power consumption, 115lm/W efficacy level, CRI90 4000K (Neutral white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class I electrical protection. Photobiological Risk Group 1. Lifespan 93k hours at L80B50. Glow Wire test 850°C. Integrated emergency with 3-hours LiFePO4 battery. Non-dimmable driver.

## Product Overview


<b>Product name</b>	OFFICELYTE 600 4000K C90 HO EM
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Office, Education
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	4,200
<b>Luminaire efficacy (lm/W)</b>	115
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	90

# Concord

## OFFICELYTE 600 4000K C90 HO EM 2069535

Colour Variation Initial (SDCM)	3
Beam Angle (°)	87
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	345
Total power consumption (W)	36.5
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5025768695355
Warranty	5 years
Dimming method	N/A

### Photometry

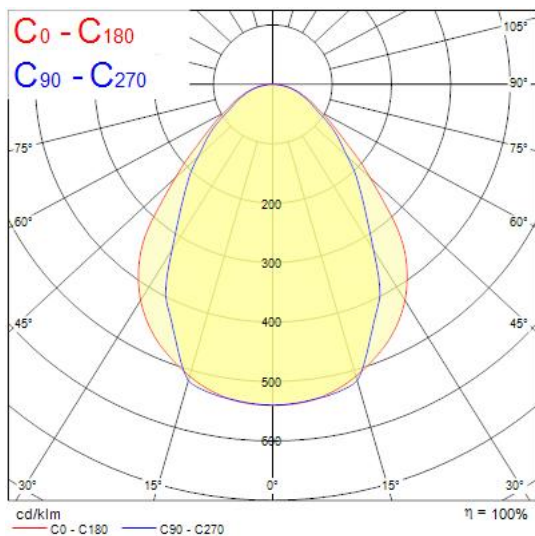

### Technical drawings

