


Walraven BISMAT® Flash (M8/M10)

(A0505)

for steel, copper, cast iron and plastic (multilayer) pipe

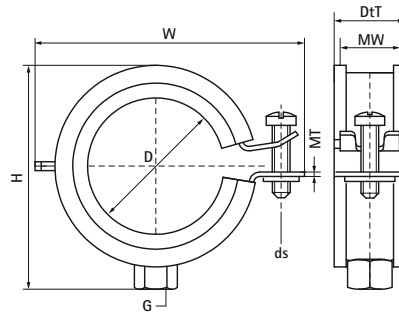

Features & benefits

- single screw clamp
- with Walraven BISMAT® Flash quick locking system
- clamp easy to close with one hand
- the locking screw can be secured without use of tools
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- optimised noise insulation due to soft closing without tools
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Material Width x Material Thickness	Screw Size	Total Width x Total Height x Total Depth	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	MW x MT	ds	W x H x DtT		Fa,z
Unit description	mm		"		mm x mm		mm x mm x mm		N
3374018	15 - 18	DN 10	3/8	M8/M10	20 x 1.00	M6	44 x 20 x 49	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	500
3374023	20 - 23	DN 15	1/2	M8/M10	20 x 1.00	M6	47 x 20 x 54	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	500
3374028	25 - 28	DN 20	3/4	M8/M10	20 x 1.00	M6	52 x 20 x 59	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	500
3374035	32 - 35	DN 25	1	M8/M10	20 x 1.00	M6	59 x 20 x 65	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	500
3374043	40 - 43	DN 32	1 1/4	M8/M10	20 x 1.25	M6	72 x 70 x 20	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	700
3374051	48 - 51	DN 40	1 1/2	M8/M10	20 x 1.25	M6	80 x 79 x 20	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	700
3374056	53 - 56	-	-	M8/M10	20 x 1.25	M6	85 x 84 x 20	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	700
3374063	57 - 63	DN 50	2	M8/M10	20 x 1.25	M6	91 x 90 x 20	ETA RAL-GZ 655/B RAL-GZ 656 CE ITB (KOT) ISO 3822-1 EPD	700