



Features

• OPTIX SURFACE 1200 MPO D 4000K DALI is a high efficacy low glare surface or suspended LED Linear luminaire with Micro Prismatic diffuser, with direct light distribution, luminaire dimensions: 1200x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, DALI Dimmable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 2863lm luminous flux, 24W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, lifespan: 58,000 hours L90B10, photobiological safety risk group 1. Electrical protection Class I.


Product Overview

| | |
|---------------------------------|-------------------------------------|
| Product name | OPTIX SURFACE 1200 MPO D 4000K DALI |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting |
| Fixture luminous flux (lm) | 2863 |
| Luminaire efficacy (lm/W) | 124 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 23 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |

OPTIX SURFACE 1200 MPO D 4000K DALI 2021674

| | |
|--------------------|---------------|
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5025768216741 |
| Warranty | 5 years |

Photometry

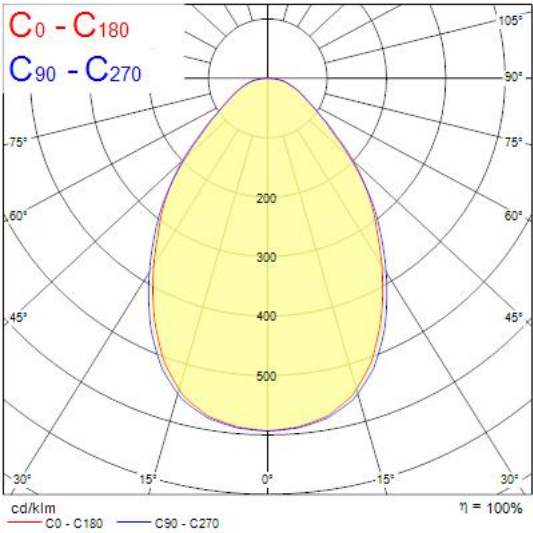

Technical drawings

