

Concord

ROUTELED II CORRIDOR DALI 2059463



Features

- Miniature self-test (DALI) emergency recessed luminaire downlight with corridor optic, non-maintained 3 hr emergency, standalone unit with inverter module and rechargeable battery (NiMH), quick and easy installation with inverter module and battery pack contained in articulated case that can pass through 40mm cutout, 219lm, 3W, IK07, beam angle 148 degrees, 230V, 50-60Hz, recharge period 24 hours, Power Factor 0.45, charge current 300mA, LxWxD (mm) 416x29x26.


Product Overview

Product name	ROUTELED II CORRIDOR DALI
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture luminous flux (lm)	212
LOR (%)	100
Colour temperature (K)	5000
Light colour	Cool White
CRI (Ra)	70
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	219
Electrical protection	Class II
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768594634
Warranty	5 years


Concord

ROUTELED II CORRIDOR DALI 2059463

Photometry

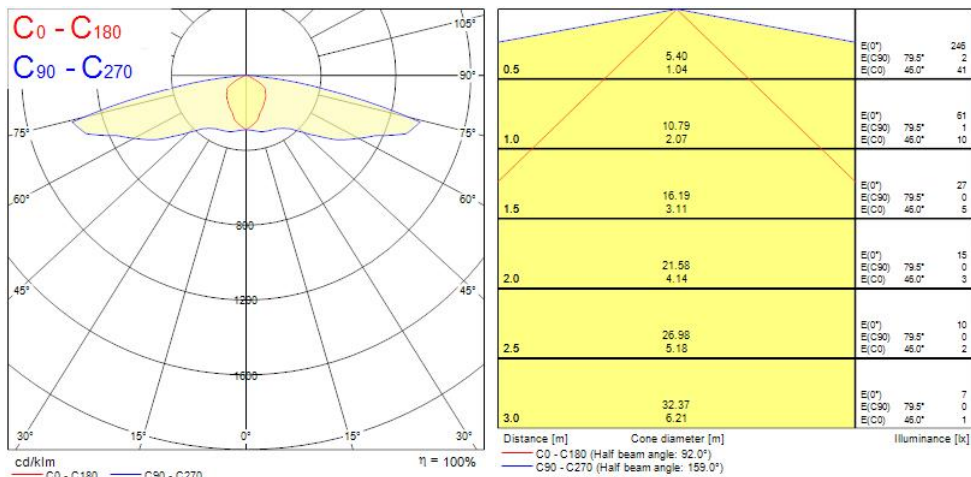

Technical drawings

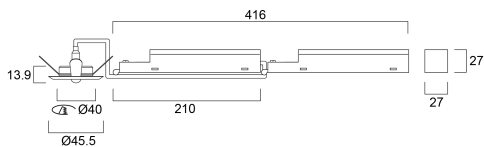

Data table

GENERAL DATA

Product name	ROUTELED II CORRIDOR DALI
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Operating temperature range (°C)	0°C...+35°C

Concord

ROUTELED II CORRIDOR DALI 2059463

Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	212
LOR (%)	100
Colour temperature (K)	5000
Light colour	Cool White
CRI (Ra)	70
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	219
Emergency duration (h)	3

ELECTRICAL DATA

Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear required	No
Drive current (mA)	200
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Nominal Product Length (mm)	416
Weight (kg)	0.948
Recessed Depth (mm)	80

PACKAGING

Concord

ROUTELED II CORRIDOR DALI 2059463

Single packaging type	Carton
Product EAN number	5025768594634
Packaging single width (cm)	18.0
Packaging single depth (cm)	11.0
DUN14 (outer)	05025768594634
Packaging outer length / height (cm)	21.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No