


Walraven BISOFIX® PIR20

(D0350)

for insulated pipes

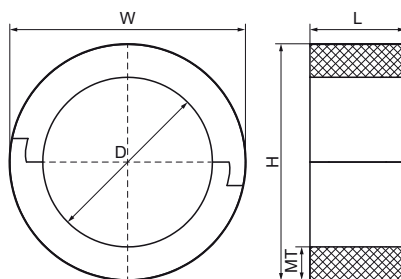

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm}$ = 80kg/m^3
- PIR density for $D > 110\text{mm}$ = 120kg/m^3
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ }^{\circ}\text{C}$ - $+105\text{ }^{\circ}\text{C}$



Product Number	VVS Number	Outside Pipe Diameter	DN	Total Height	Total Width	Total Length	Material Thickness	Operating Temperature	Maximum Allowed Load Faz
Reference Letter		D	D	H	W	L	MT		F _{0,z}
Unit description		mm		mm	mm	mm	mm	CEL	N
I200000012		12		52	52	75	20.00	-45 - 105	120
I200000015	18059215	15 - 16		55	55	75	20.00	-45 - 105	160
I200000018	18059218	17.2 - 18	DN 10	58	58	75	20.00	-45 - 105	170
I200000020		20		60	60	75	20.00	-45 - 105	180
I200000022	18059222	21.3 - 22	DN 15	62	62	75	20.00	-45 - 105	180
I200000025		25		65	65	75	20.00	-45 - 105	190
I200000028	18059228	26.9 - 28	DN 20	68	68	75	20.00	-45 - 105	200
I200000032		32		72	72	75	20.00	-45 - 105	210
I200000034	18059235	33.7 - 35		75	75	75	20.00	-45 - 105	220
I200000040		40		80	80	75	20.00	-45 - 105	260
I200000042	18059242	42.4	DN 32	82	82	75	20.00	-45 - 105	280
I200000048	18059248	48.3	DN 40	88	88	75	20.00	-45 - 105	300
I200000050		50		90	90	75	20.00	-45 - 105	310
I200000054	18059254	54		94	94	75	20.00	-45 - 105	320
I200000057	18059257	56 - 57		97	97	75	20.00	-45 - 105	330
I200000060	18059260	60.3	DN 50	100	100	75	20.00	-45 - 105	340
I200000064	18059264	64		104	104	75	20.00	-45 - 105	350
I200000070	18059270	70		110	110	75	20.00	-45 - 105	370
I200000076	18059276	76.1	DN 65	116	116	75	20.00	-45 - 105	390
I200000089	18059289	88.9	DN 80	129	129	75	20.00	-45 - 105	430
I200000102	18059292	101.6		142	142	75	20.00	-45 - 105	450
I200000108	18059290	108		148	148	75	20.00	-45 - 105	500
I200000114	18059291	114.3	DN 100	154	154	100	20.00	-45 - 105	1,110
I200000133		133		173	173	100	20.00	-45 - 105	1,360
I200000140		139.7	DN 125	180	180	100	20.00	-45 - 105	1,410
I200000160		159 - 160		200	200	100	20.00	-45 - 105	1,520
I200000168		168.3	DN 150	208	208	100	20.00	-45 - 105	1,570
I200000219		219.1	DN 200	259	259	150	20.00	-45 - 105	1,620
I200000273		273.1		313	313	150	20.00	-45 - 105	1,670