


Optix Surface 1200 Asymmetric
OPTIX SURFACE 1200 ASYMMETRIC 3000K SSC
2021678

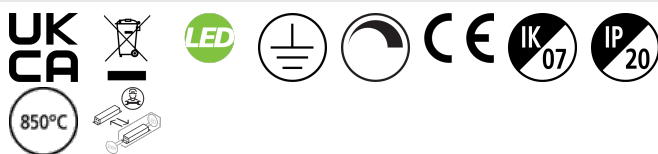

PRODUCT OVERVIEW

Product name	OPTIX SURFACE 1200 ASYMMETRIC 3000K SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Warranty	5 years
Fixture luminous flux (lm)	3380
Luminaire efficacy (lm/W)	109
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG0
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216789

DATA TABLE

General data	
Product name	OPTIX SURFACE 1200 ASYMMETRIC 3000K SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Operating temperature range (°C)	10°C...+25°C

Optix Surface 1200 Asymmetric

OPTIX SURFACE 1200 ASYMMETRIC 3000K SSC

2021678

Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3380
Luminaire efficacy (lm/W)	109
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	31
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.98
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	300
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	58000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Other
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	200
Weight (kg)	3.9

Packaging

Single packaging type	Carton
Product EAN number	5025768216789

Optix Surface 1200 Asymmetric


OPTIX SURFACE 1200 ASYMMETRIC 3000K SSC
2021678

Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (outer)	05025768216789
Packaging outer length / height (cm)	122.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

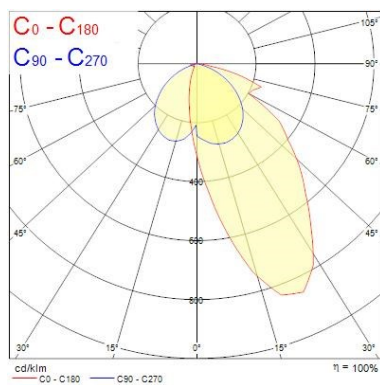

TECHNICAL DRAWINGS

