



Features

- The new Start eco Flood Flat comes with improved design. The streamlined, durable, lightweight die-cast aluminium body makes it a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black die-cast aluminum housing, white reflector, 4750 lm, 50 W, 95 lm/W, 4000K, drive current 193 mA, non dimmable, CRI>80, IP65, IK07, Class I, lumen maintenance L70:B50: 30000 hrs, 193 x 190 x 48 mm (L x W x H). Weight: 0.785kg. Energy class: A++ A+ A.


Product Overview

| | |
|-----------------------------------|--------------------------------------|
| Product name | START eco Flood Flat IP65 4500lm 840 |
| Technology | LED |
| Housing | Aluminium |
| General application | Residential & Consumer |
| ETIM Class | EC001744 |
| E-number FI | 4579437 |
| Fixture luminous flux (lm) | 4750 |
| Luminaire efficacy (lm/W) | 95 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Beam Angle (°) | 110 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 50 |
| Electrical protection | Class I |
| Housing colour | RAL9017 |
| IP rating | IP65 |
| IK rating | IK07 |

START eco Flood Flat IP65 4500lm 840 0047969

| | |
|-----------------------------|---------------|
| Product EAN number | 5410288479699 |
| Warranty | 3 years |
| Useful luminous flux (#use) | 4750 |

Photometry

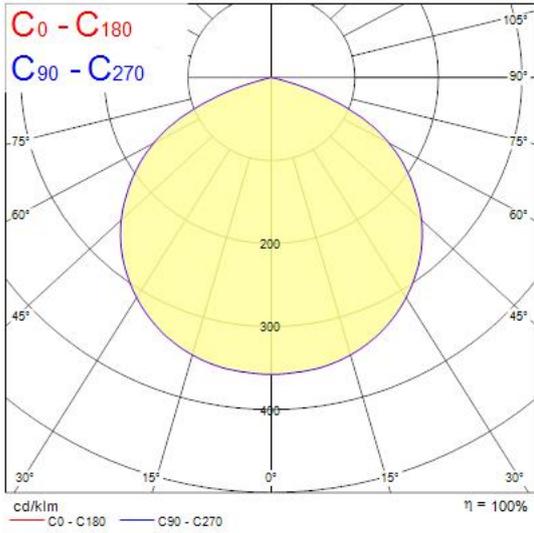

Technical drawings

