

Start Spot Scoop


START SPOT SCOOP 1950LM 940 MB WHITE

0060583



Product features

- Recessed Adjustable Accent Downlight, integrated LED, die cast aluminium body, Ø155mm cut-out, CCT 4000K, SDCM<3, CRI90, 1950lm, total power consumption 20W, resulting in 98lm/W.


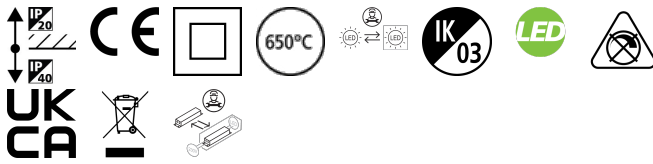


PRODUCT OVERVIEW

Product name	START SPOT SCOOP 1950LM 940 MB WHITE
Technology	LED
Housing	Aluminium
Environment	Indoor
General application	Retail
ETIM Class	EC001744
E-number FI	4276980
Warranty	5 years
Useful luminous flux (Fuse)	1950
Fixture luminous flux (lm)	1950
Luminaire efficacy (lm/W)	98
Correlated colour temperature (k)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	32
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288605838

PHOTOMETRY

Start Spot Scoop *START SPOT SCOOP 1950LM 940 MB WHITE* 0060583

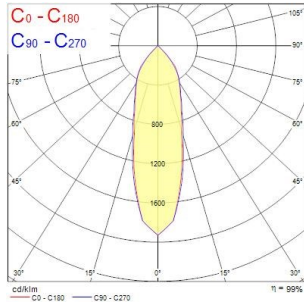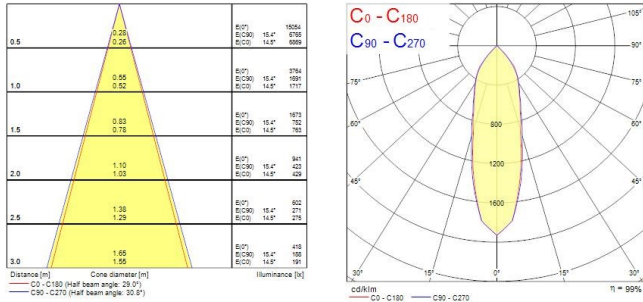

TECHNICAL DRAWINGS

